

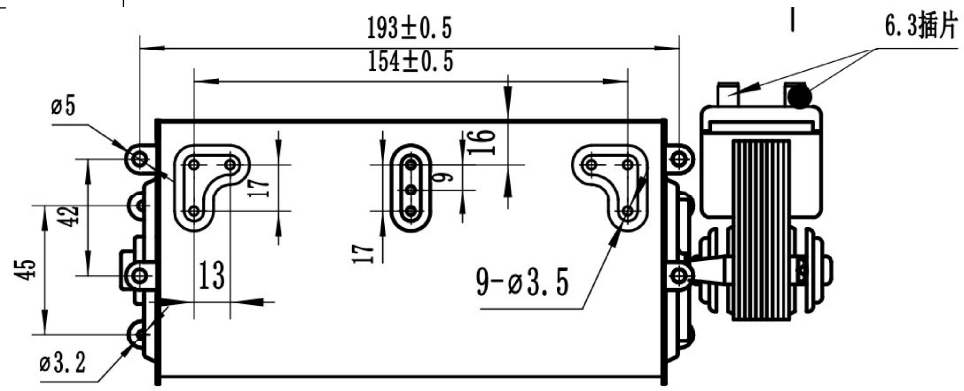


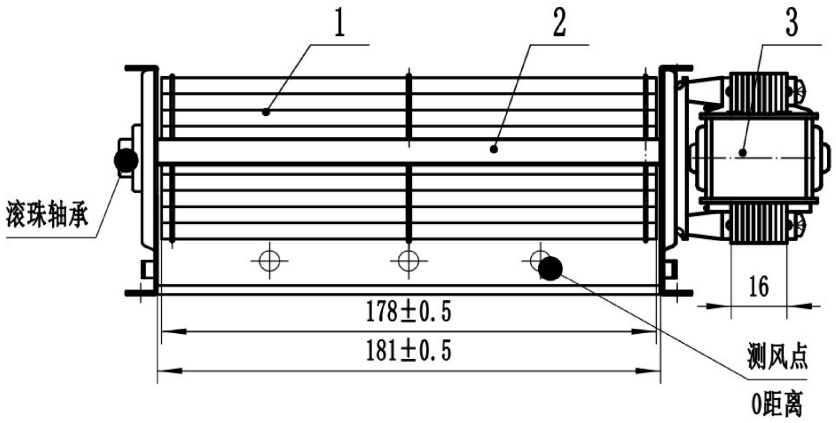

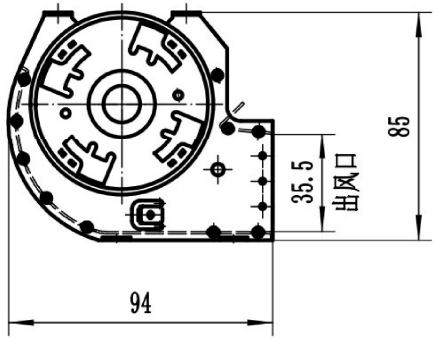

Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Diagonal flow, 22 blades, steel shaft ø3, bushing ø 1.5
4. Impeller direction: left rotation, sleeve built-in.
5. Safety performance in accordance with GB/T13933-2008 regulations.
6. Unnoted tolerance is GB/T1804-v.

SPECIFICATION

VOLTAGE (V)	AC 220V
FREQUENCY (Hz)	50
SPEED (r/min)	1600
BEARINGS	Ball bearing
INPUT POWER (W)	23

Mark	Qty	Sign	Name	Date

Stage Mark		
S		
Version A1	Name	Date
Design	HE	20250509
Audit		
Technical		
Standard		
Approve		

Material | Ratio 1:1 | Weight

Ningbo Longwell Electric Technology Co., Limited

LWCA-60180SN-14

第 1 页 共 1 页