
LWBA-220 Series



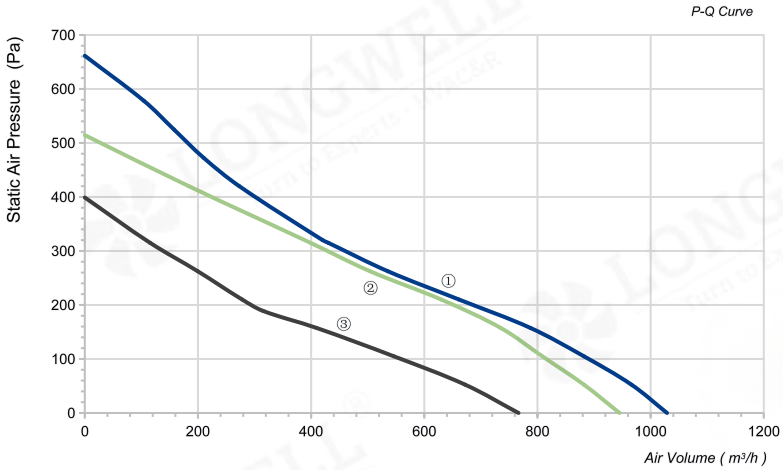



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E220-092NS-01	230	60	129	0.56	2780	1029	662	67.1	3uF	①
LWBA2E220-092NS-02	230	50	101	0.44	2530	945	515	66.6	3uF	②
LWBA4E220-092NS-03	230	50	64	0.29	2180	767	399	62.2	2.5uF	③

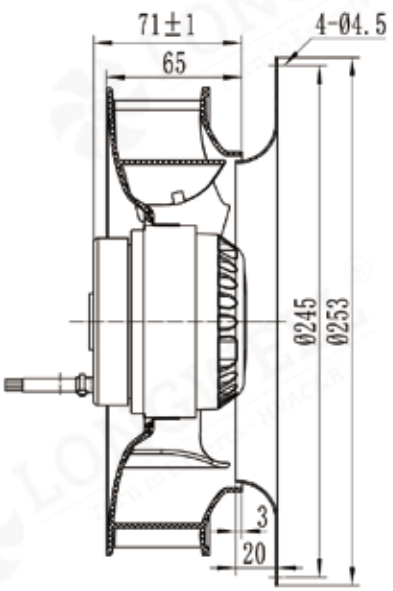

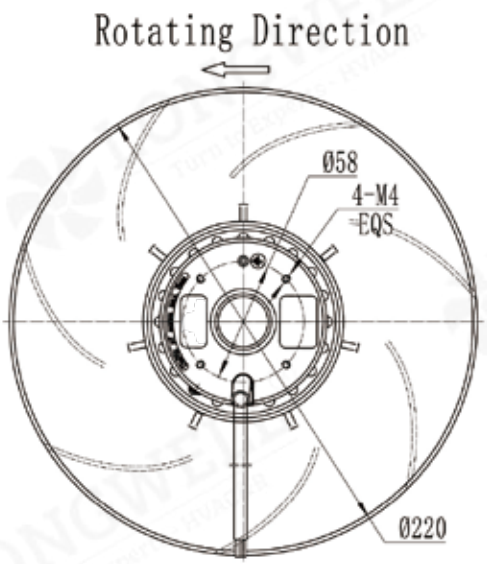

LWBA-220 Series

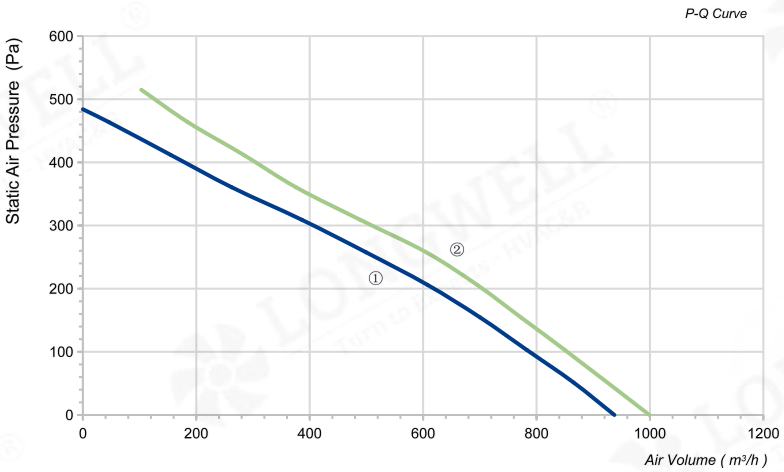





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E220-092NS-04	230	50	90	0.41	2500	937	484	70	2.5uF	①
LWBA2E220-092NS-05	230	60	100	0.46	2700	999	515	73	2.5uF	②
LWBA2D220-092NT-06	380	50	85	0.17	2500	937	484	70	/	①
LWBA2D220-092NT-07	380	60	100	0.2	2700	999	515	73	/	②

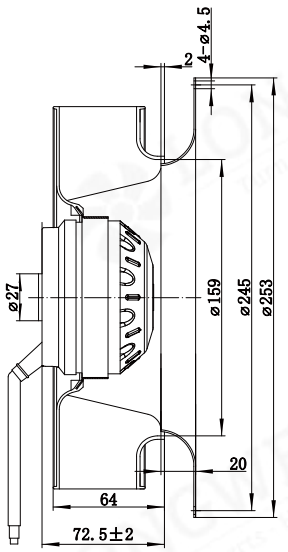

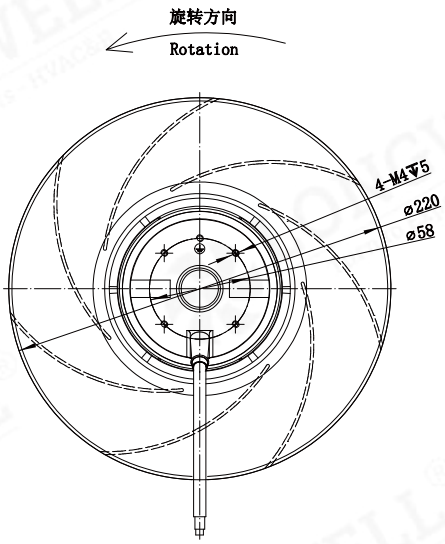

LWBA-220 Series

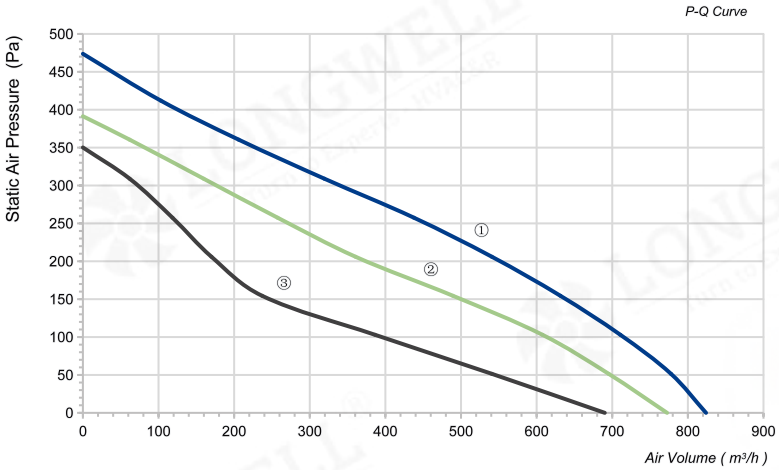





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E220-092NS-08	230	50	95	0.44	2500	824	474	70	2.5uF	①
			90	0.4	2300	773	391	67	2.5uF	②
			88	0.4	2000	690	350	64	2.5uF	③

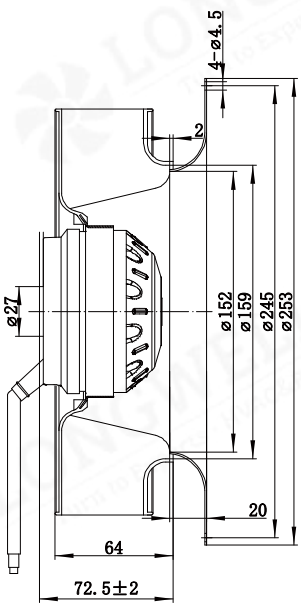

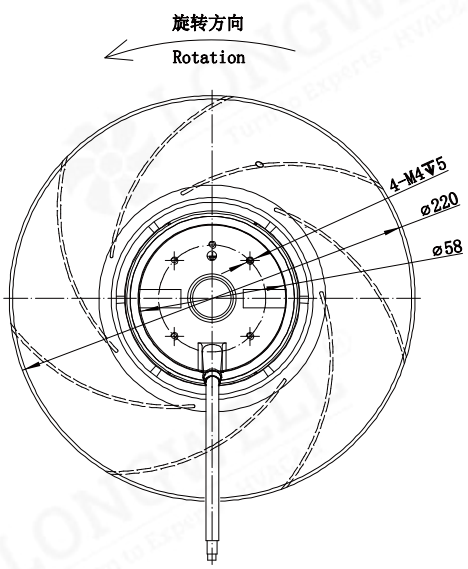

LWBA-220 Series

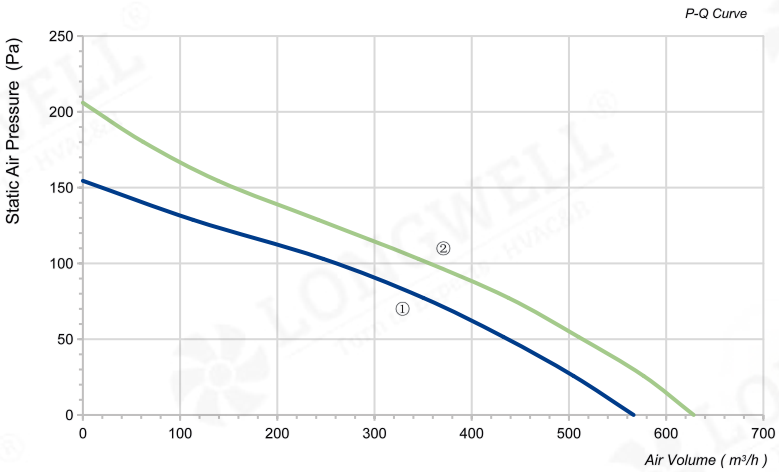



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E220-092NS-09	230	50	40	0.23	1420	567	155	52	1.5uF	①
LWBA4E220-092NS-10	230	60	41	0.19	1650	628	206	58	1.5uF	②
LWBA4D220-092NT-11	380	50	38	0.08	1400	567	155	52	/	①
LWBA4D220-092NT-12	380	60	41	0.1	1650	628	206	58	/	②

