
LWBA-560 Series



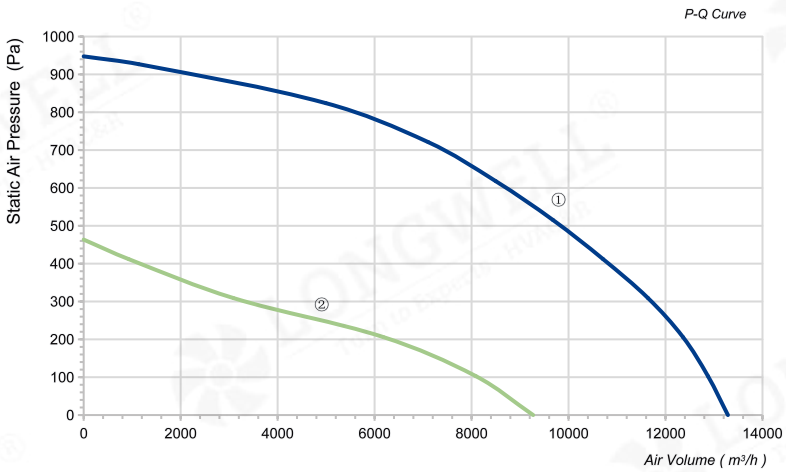



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D560-188NT-01	380	50	2500	4.5	1340	13287	948	85	/	①
LWBA6D560-188NT-02	380	50	900	1.8	910	9270	464	73	/	②

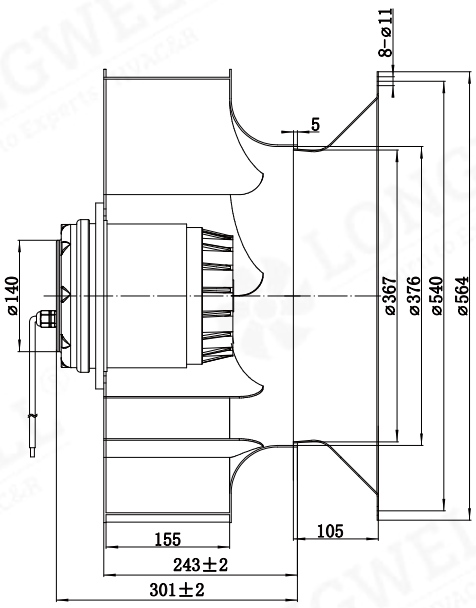

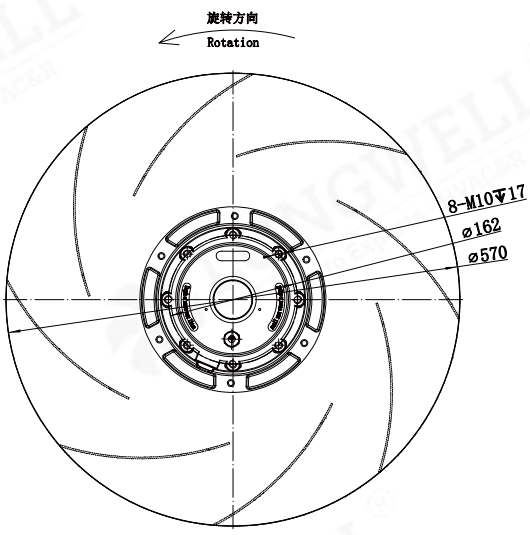

LWBA-560 Series

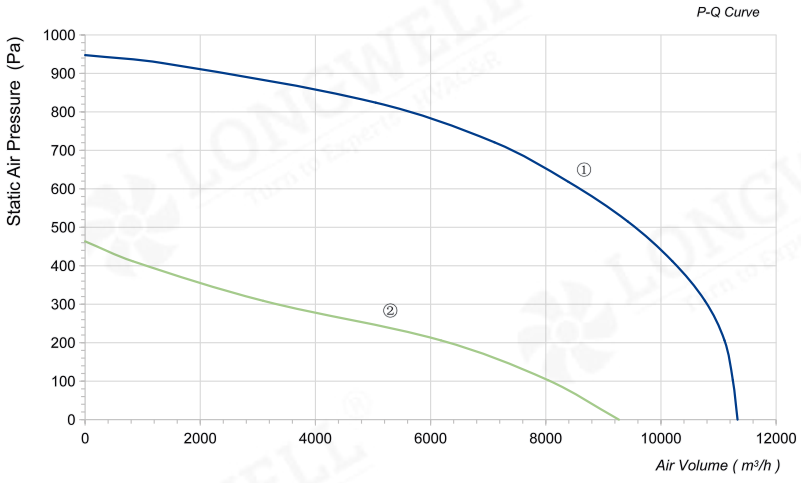





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D560-188NT-03	380	50	2500	4.5	1350	11330	948	85	/	①
LWBA6D560-188NT-04	380	50	900	1.8	910	9270	464	73	/	②

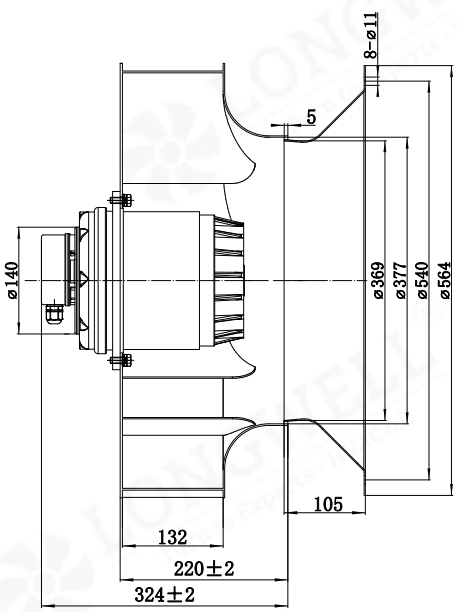

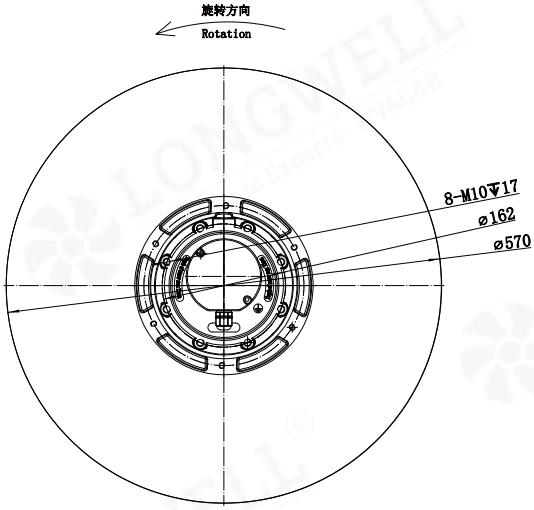

LWBA-560 Series

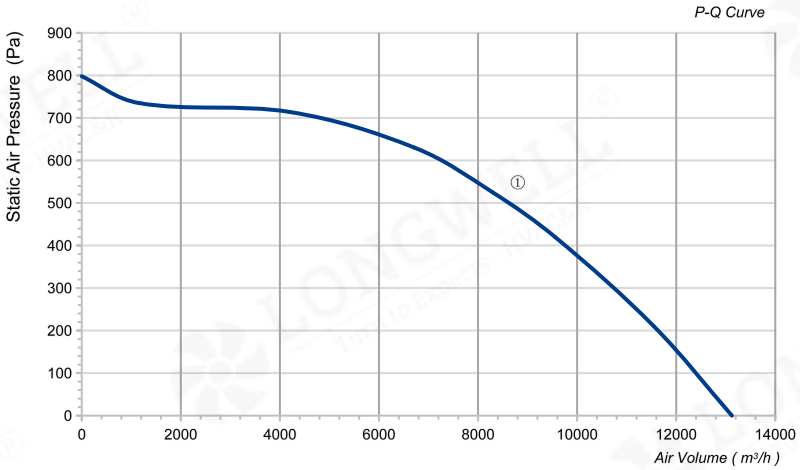



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D560-188NT-05	380	50	1980	3.5	1350	13125	798	83.9	/	①

