

AC Silent Fan-Unidirectional Direct Exhaust Type

Multiple sizes and air volumes available to match a variety of scenarios and needs.

Multiple noise reduction technology, minimum 20dB, truly quiet and low noise.

Fully galvanized body, electrostatic powder coating process. Beautiful appearance, anti-corrosion and wear-resistant.


Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

Product Parameters


Performance Parameter

Model	Nozzle Diameter (mm)	Voltage (V)	Air Flow (m³/h)	Pressure (Pa)	Power (W)	Noise (dB(A))	Product Size (kg)
LWDA100S-C20-001	Φ100	220	120	100	20	20	420×290×175
LWDA100S-C40-001	Φ100	220	200	150	40	23	420×290×175
LWDA150S-C50-001	Φ150	220	350	160	50	26	440×300×190
LWDA150S-C60-001	Φ150	220	500	170	60	30	500×360×225
LWDA200S-C210-001	Φ200	220	900	220	210	36	580×380×280
LWDA200S-C230-001	Φ200	220	1200	280	230	41	580×380×280
LWDA250S-C250-001	Φ250	220	1500	300	250	42	660×420×320
LWDA250S-C450-001	Φ250	220	2000	350	450	45	660×420×320
LWDA250S-C500-001	Φ250	220	2500	450	500	50	700×560×335


Performance Curves




LWDA100S-C20-001




LWDA100S-C40-001




LWDA150S-C50-001




LWDA150S-C60-001




LWDA200S-C210-001




LWDA200S-C230-001



LWDA250S-C250-001



LWDA250S-C450-001




LWDA250S-C500-001

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

Product Parameters

Structure and Size(mm)

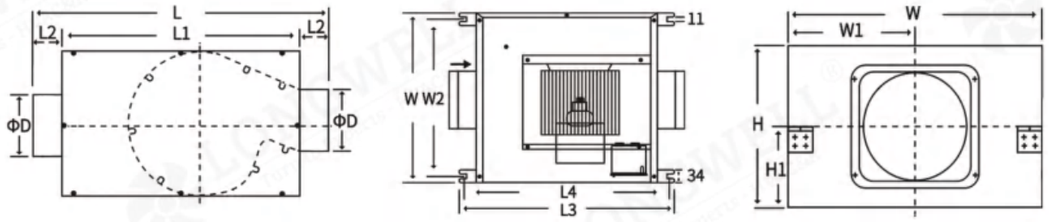

Unit (mm)

Model	L	L1	L2	L3	L4	W	W1	W2	H	H1	D
LWDA100S-C20-001	420	290	65	380	330	290	145	252	175	87	100
LWDA100S-C40-001	420	290	65	380	330	290	145	252	175	87	100
LWDA150S-C50-001	440	300	70	390	340	300	150	262	190	97	150
LWDA150S-C60-001	500	360	70	450	400	360	180	322	225	127	150
LWDA200S-C210-001	580	440	70	530	480	390	185	342	280	140	200
LWDA200S-C230-001	580	440	70	530	480	390	185	342	280	140	200
LWDA250S-C250-001	660	520	70	610	560	420	210	382	320	160	250
LWDA250S-C450-001	660	520	70	610	560	420	210	382	320	160	250
LWDA250S-C500-001	700	560	70	650	600	560	280	472	335	168	250

Selection Guide

1. This series of equipment is suitable for apartments, villas, hotels, shopping malls, entertainment venues and residential places.
2. One device supports the centralized ventilation function of multiple areas, which is widely used in real estate buildings, including indoor ventilation and ventilation and pipeline air supply and pressure.

