

LONGWELL®
Turn to Experts - HVAC&R

# Anti-corrosion High Speed Air Exchange Duct Fan

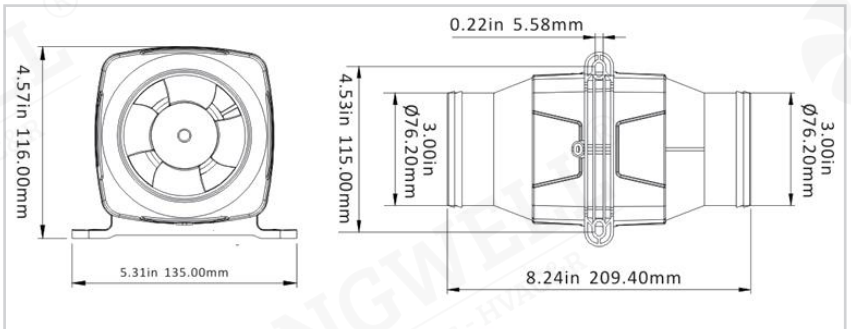

- Ventilation in bilge, engine compartment, kitchen and toilet
- Ventilation of bullet trains, buses, etc. (soot from engine room and bathroom)
- Sunlight sheds and building ventilation
- Main product performance:
  Can be installed horizontally and vertically,Low current,large air volume, long life.4 bladed impeller ensures high air volume
  Moisture-proof, good sealing performance Anti-corrosion ABS plastic housing

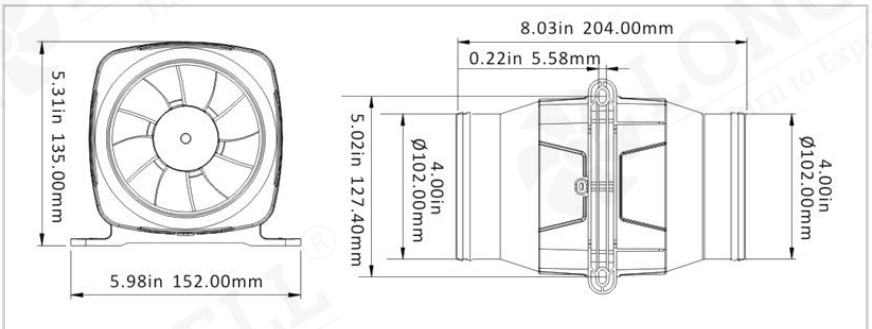


## *Technical Parameters*

| Model | Voltage (v) | Air flow (m³/h) | Current (A) | Fuse wire (A) | Size | Package size (mm) | N.W/G.W (kg) |
|---|---|---|---|---|---|---|---|
| LWDD-76(3")L-PWN-01 | 12 | 130/220 | 2.5 | 5 | 3”/76 | 215x137x120 | 0.45/0.60 |
| LWDD-76(3")M-PWN-02 | 24 | 130/220 | 1.3 | 3 | 3”/76 | 215x137x120 | 0.45/0.60 |
| LWDD-102(4")L-PWN-12 | 12 | 270/456 | 6 | 10 | 4”/102 | 207x154x114 | 0.70/0.90 |
| LWDD-102(4")M-PWN-13 | 24 | 270/456 | 3 | 5 | 4”/102 | 207x154x114 | 0.70/0.90 |