
LWFD-140 Serise



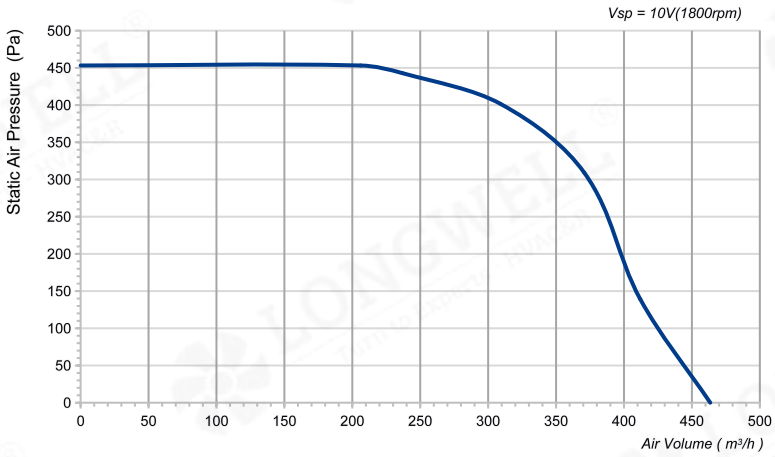



Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G140-072SM-01	24	80	3.3	1800	464	453	65	/
LWFD3G140-072SH-01	48	80	1.67	1800	464	453	65	/

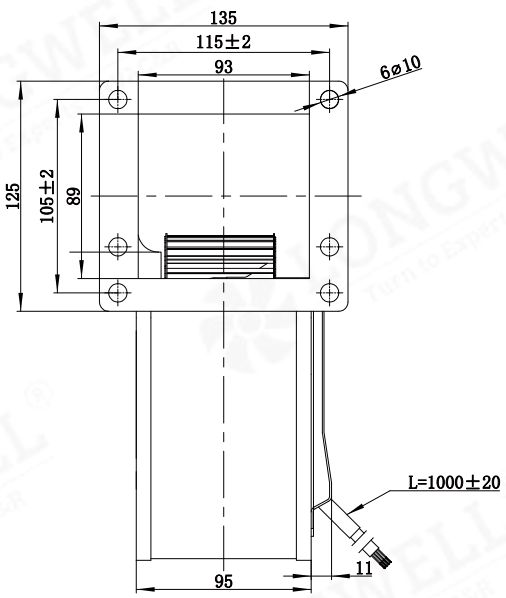

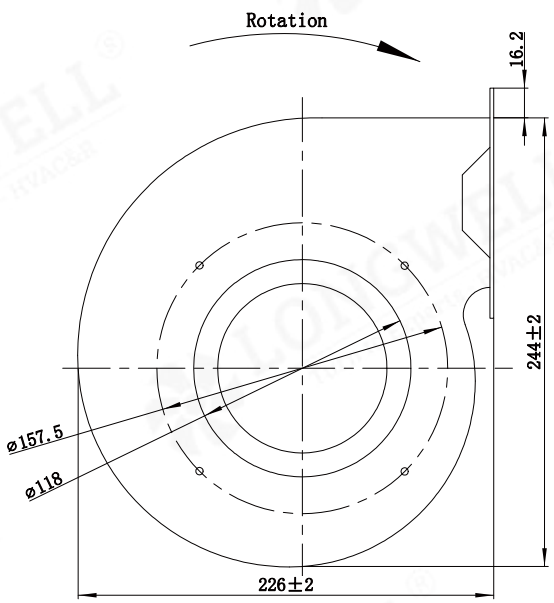

LWFD-140 Serise

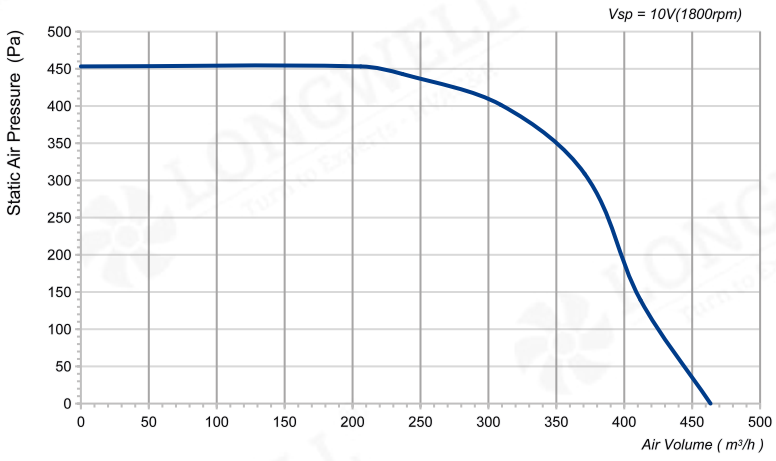




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G140-072SM-02	24	80	3.3	1800	464	453	65	/
LWFD3G140-072SH-02	48	80	1.67	1800	464	453	65	/

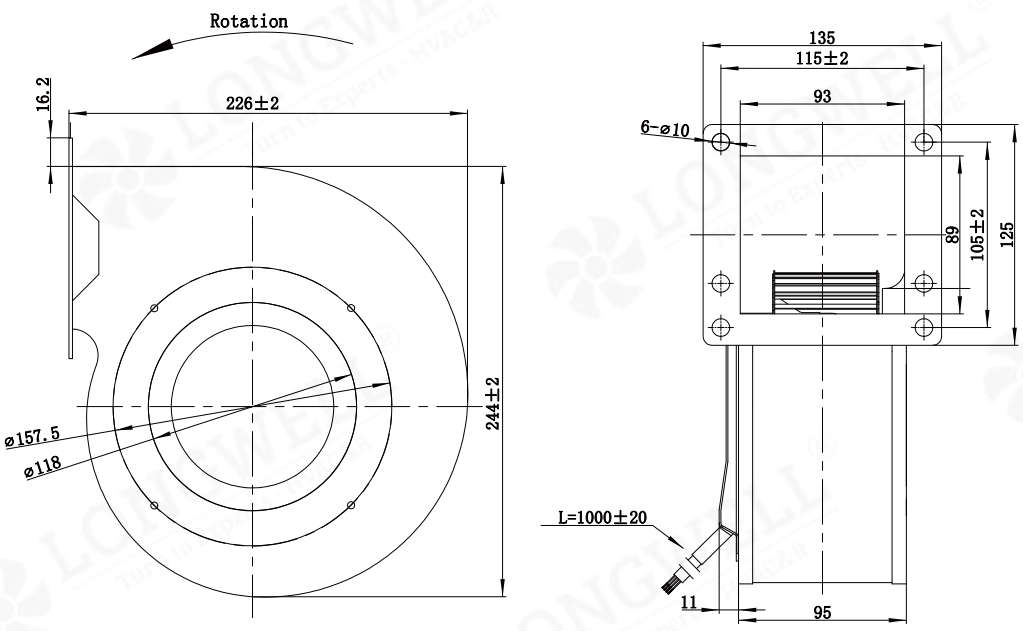

LWFD-140 Serise

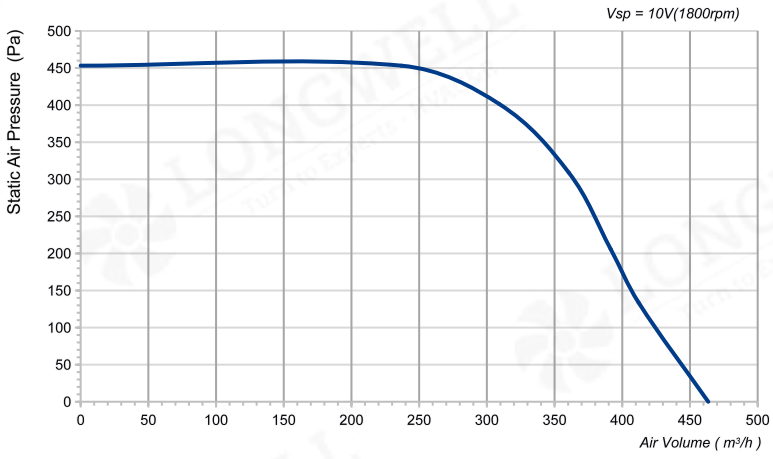




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G140-072SZ-01	310	80	0.26	1800	464	453	71	/

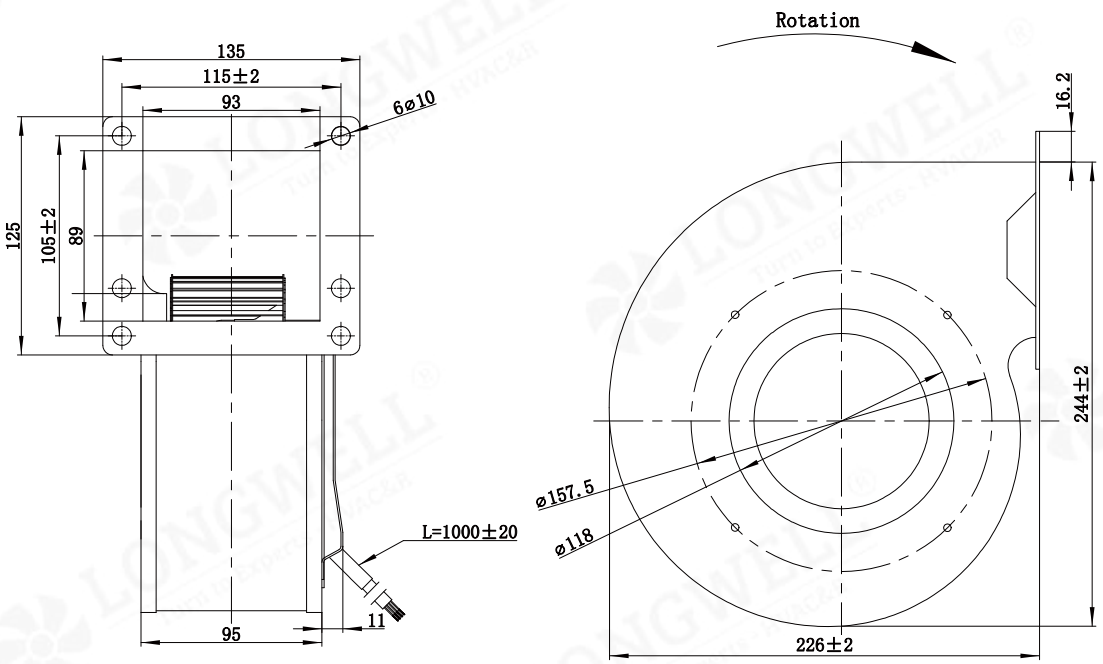

LWFD-140 Serise

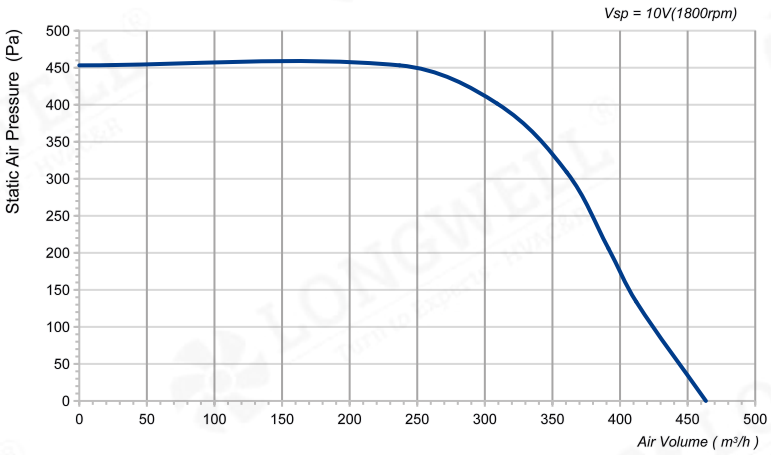



Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G140-072SZ-02	310	80	0.26	1800	464	453	71	/

