Engineered for the Critical

World's Largest Selection of Fan Products
World's Most Comprehensive Fan Solutions



LONGWELL®
Turn to Experts - HVAC&R

Ningbo Longwell Electric Technology Co., Ltd

Headquarter: NO.100, South of Xuxiang River, Yuyao, Zhejiang Province, China 315400
Tell: +86 574 6218 9863
Fax: +86 574 6218 9863
Phone: 0086 183 5827 4663
Web: www.longwellfans.com | www.longwell-group.com | www.longwell-media.com
Email: sales@zjlongwell.com

CE RoHS compliant BSCI ISO EAC UL LVD

LONGWELL®
Turn to Experts - HVAC&R

LONGWELL TECHNOLOGY

The Ventilation and Drive Technology Partner for Mission-Critical Environments







Professional Manufacturer of HVACR Fan & Motors

—— DC Gas Blower

Longwell Group
Longwell-China
Longwell-USA
Longwell-Russia
Longwell-Europe

Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com



CATALOGUE

01 Quality Control
02 Applications
03 Type Code
04 Product Feature
05-14 DC Gas Blower

Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com


Quality control

Air performance test stands
Blower opeating characteristics check
Air characteristic curve

Noise testing

Vibration test

Blower comprehensive test bench
Safety performance detection
Electrical performance testing
Data of each fan can be stored and tracked

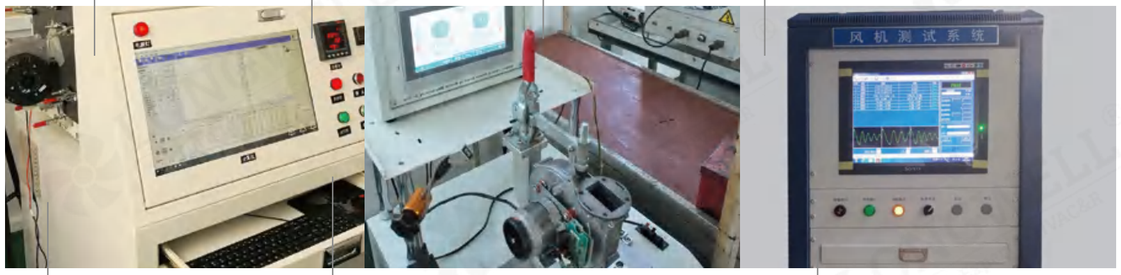

Blower pressure leakage detection

Approvals
TUV,CCC,ROHS,CUS



Aging test
Sample collection for each batch
-30°C-80°C
Over 5,000 hours of runing test

Ideally suited for all applications

Residential technology 150 kW



Energy efficient heating and heating system for family house


Commercial technology




Application of commercial complex heating system, commercial energy-saving kitchen equipment system, various burners and steam generator.



Electrical Schematic Diagram

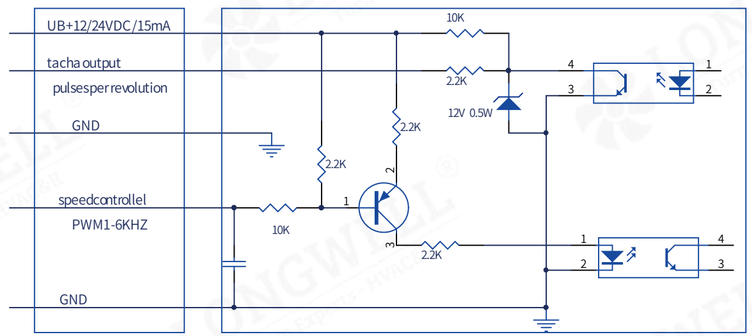



Type Code

LW G D 77 S - 01

- Series Number
- T-380V S-230V U-115V
  L-12V M-24V H-48V
- Diameter Of blades
- A-AC D-DC E-EC
- G-Gas Blower
- Longwell


Product feature

Electric control board:
Independent installation design for easy disassembly and maintenance
Brushless motor drive, PWM signal adjustment, FG signal output
Blocking protection and current limiting protection

Housing:
Die cast aluminum housing
Seal joint treatment
Up to 4000PA leak detection

Impellers:
Fluid simulation optimi zation design High - st rength electrostatic dis charge plastic Dynami c balance calibration

Connection port:
International standard terminal

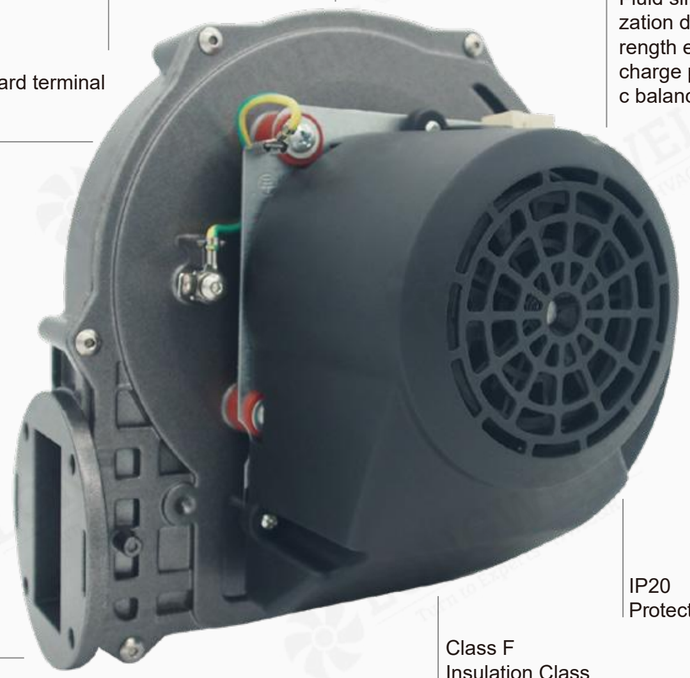

Bearings:
Maintenance - free ball bearings

IP20
Protection class:IP20

Class F
Insulation Class
Class F

way to install:
Shaft horizontal or motor mounted on top



Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com

DC Gas Blower

- Powerful airflow capabilities for effective gas movement and circulation
- Minimizes pressure drops and optimizes gas flow rates for enhanced productivity
- Advanced control systems for accurate gas flow adjustment and regulation
- Enables fine-tuning of gas processes and ensures consistency in gas handling operations
- Built-in safety features to prevent gas leaks and maintain operational integrity



Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com

LWGD108 Series (Premixed Blower)


Product Characteristic

- Insulation class: F
- Housing &impeller: Aluminized sheet steel
- Flue temperature: ≤180℃ (continuous)
  ≤240℃ (instantaneous)
- Motor anti-vibration mounted
- EC Motor with PWM speed control




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGD108M-01	24DC	/	42	1.7	3700	191	597

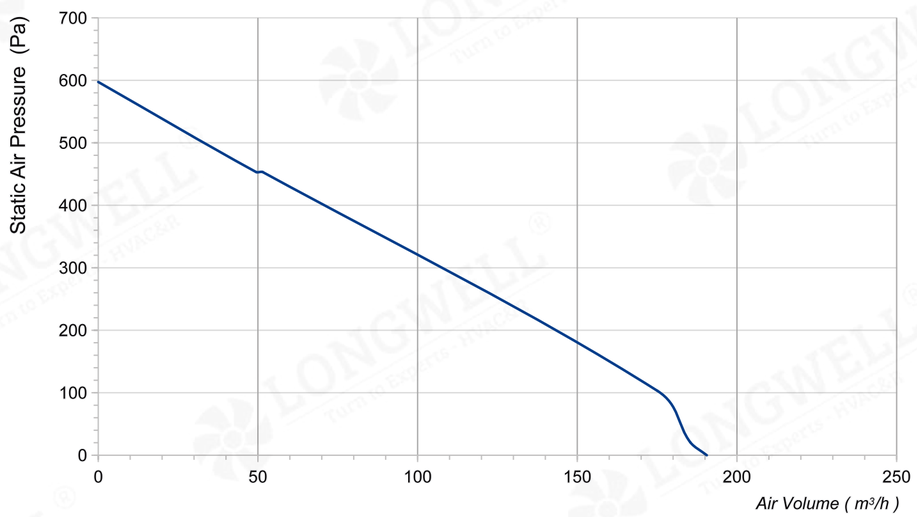

Product Drawing (mm)

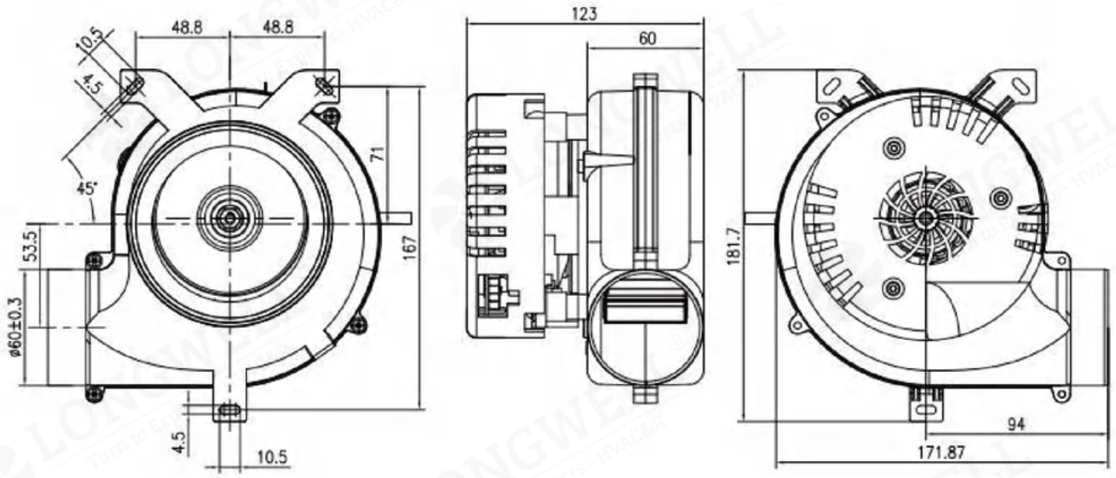

Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com

LWGD118 Series




Product Characteristic


- Protection class: IP20
- Impellers: Pplastic
- Insulation Class: Class F
- Housing: Aluminum
- Operating / Storaging humidity: 0% to 95% RH
- Operating / Storaging Temp: 0°C to + 70°C /-25°C to + 80°C
- Connection port: International standard terminal
- Bearings: Maintenance - free ball bearings
- Way to install: Shaft horizontal or motor mounted on top

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Input Power (W)	Speed (RPM)	Air Volume (m^3/h)	Current (A)	Air Pressure (Pa)	Net Weight (kg)
LWGD118M-01	24	50/60	60	8000	95	2.5	2500	1

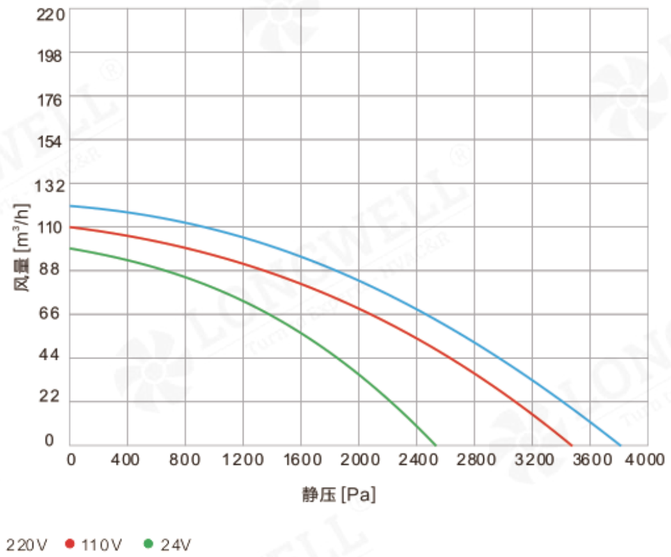

Product Drawing (mm)

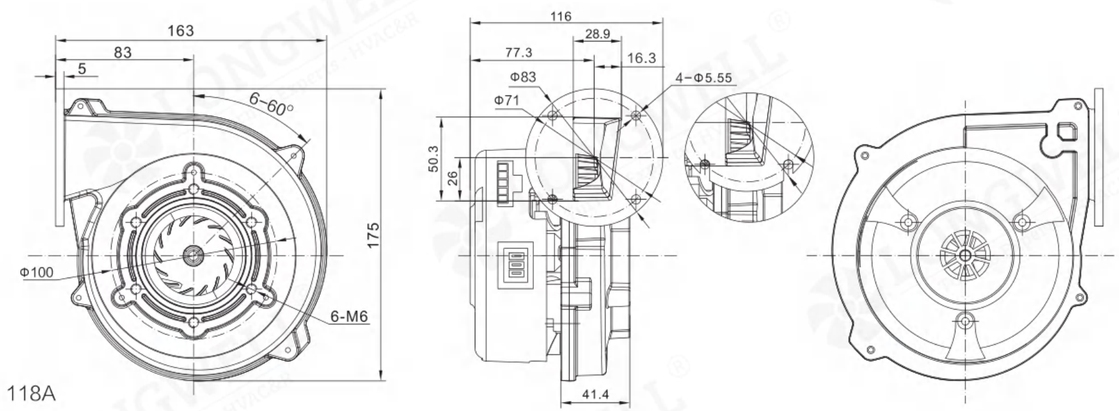

Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com

LWGD130 Series (Premixed Blower)


Product Characteristic

- Insulation class: F
- Die-cast aluminum housing
- Anti-spark plastic impeller
- PWM for speed control
- Motor anti-vibration mounted




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGD130M-01	24DC	/	48	2	8200	124	2060
LWGD130L-02	12DC	/	48	4	8200	124	2060

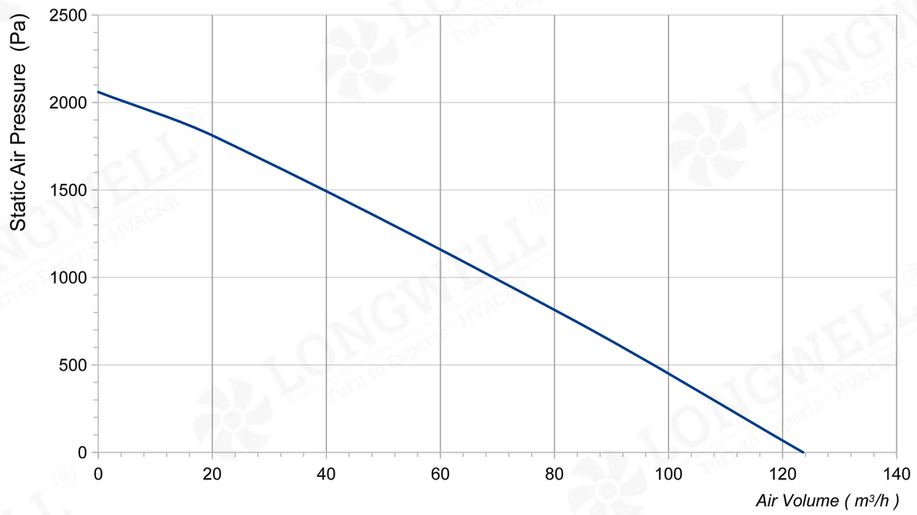

Product Drawing (mm)

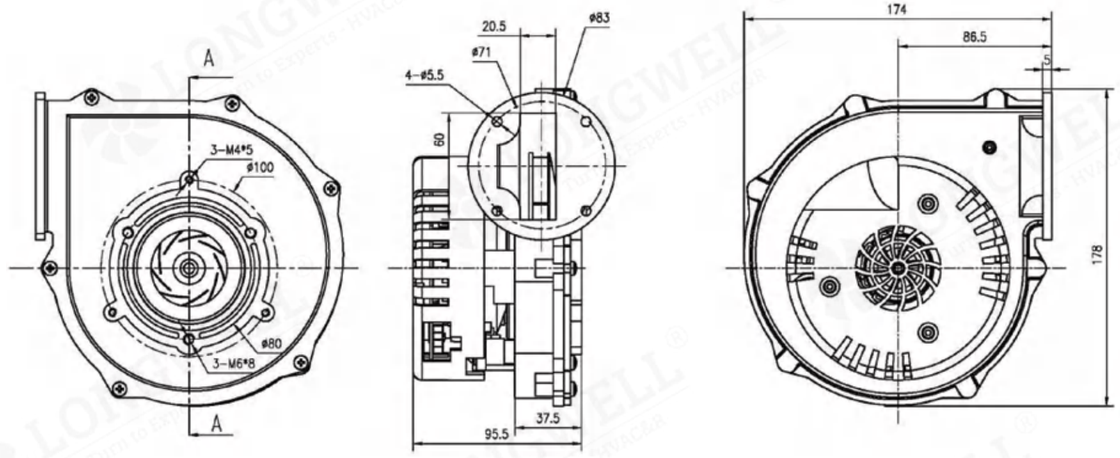

Ningbo Longwell Electric Technology CO, LTD
https://www.longwellfans.com Email:sales@zjlongwell.com

LWGD150 Series (Exhaust Blower)


Product Characteristic

- Insulation class: F
- Housing &impeller: Aluminized sheet steel
- Flue temperature: ≤180℃ (continuous)
  ≤240℃ (instantaneous)
- Motor anti-vibration mounted
- Mounting position must be specified for corresponding support elements



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGD150L-01	12DC	/	42	3.52	4000	165	556
LWGD150M-02	24DC	/	41	1.7	4000	165	556

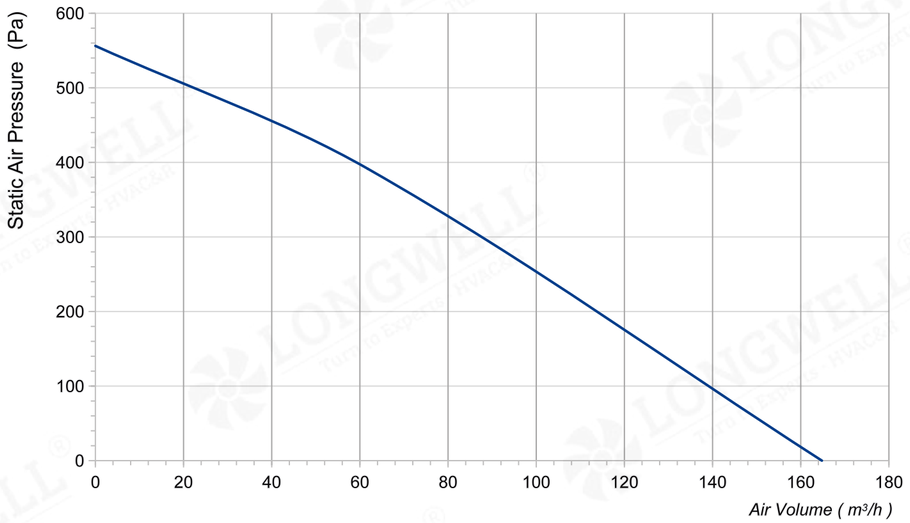

Product Drawing (mm)

