
LWBE-220 Serise



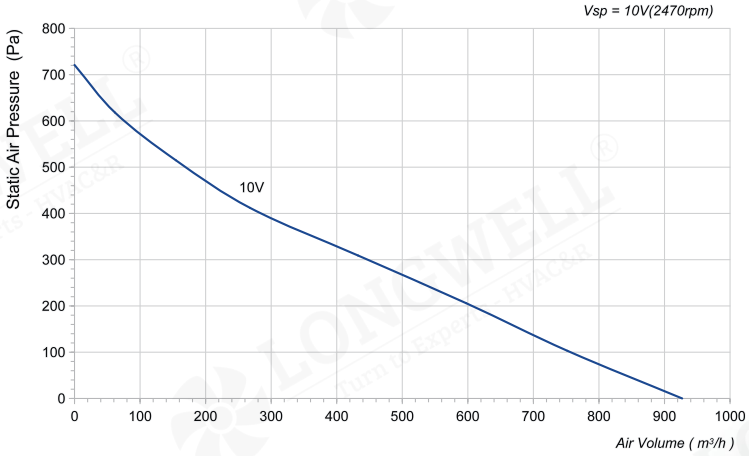


Product Characteristic


- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G220-072NS-07	230	86	0.71	937	721	2470	68
LWBE3G220-072NU-13	115	86	1.4	937	721	2470	68

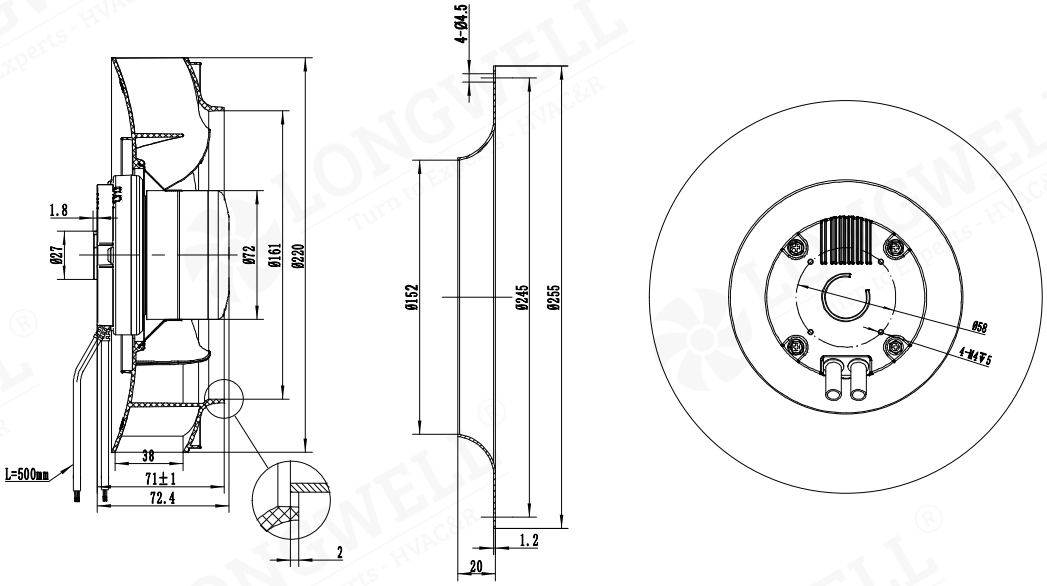

LWBE-220 Serise

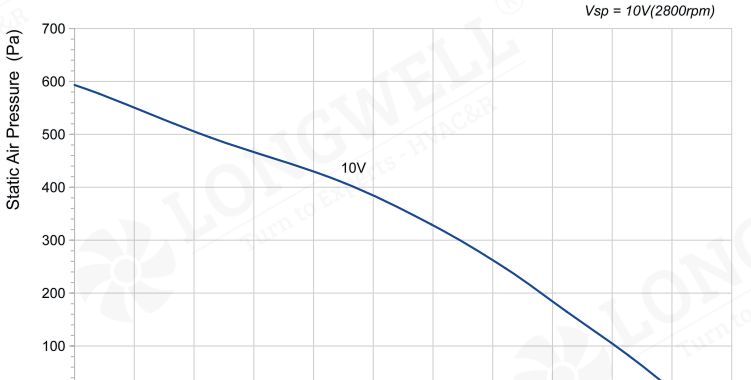




Product Characteristic

• Impeller Material:	PA6+GF	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP55	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM


• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G220-072NS-09	230	115	0.9	1020	597	2800	69
LWBE3G220-072NU-14	115	115	1.8	1020	597	2800	69

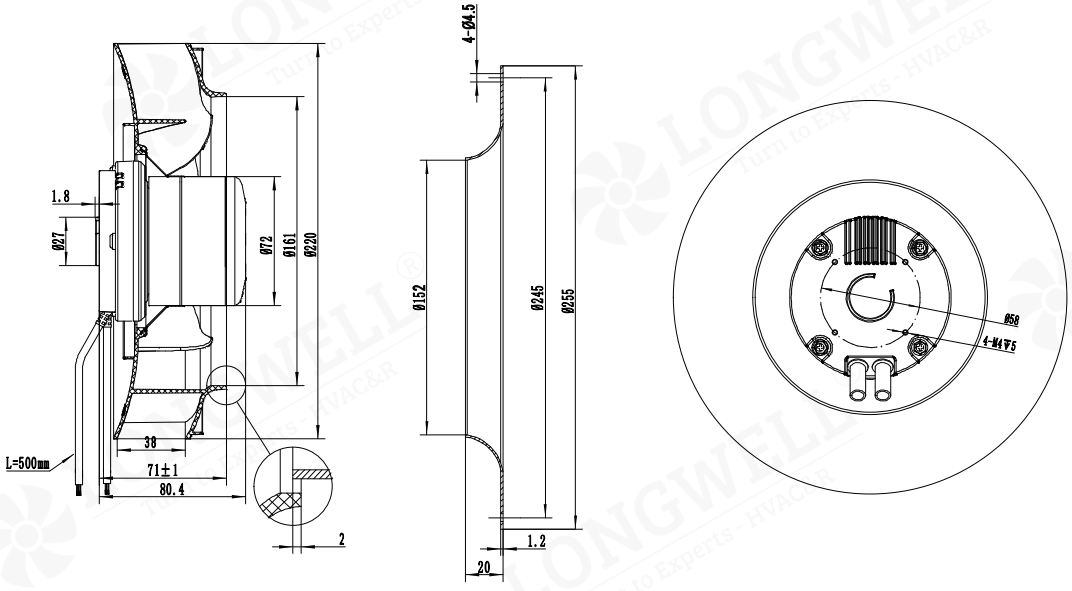

LWBE-220 Serise

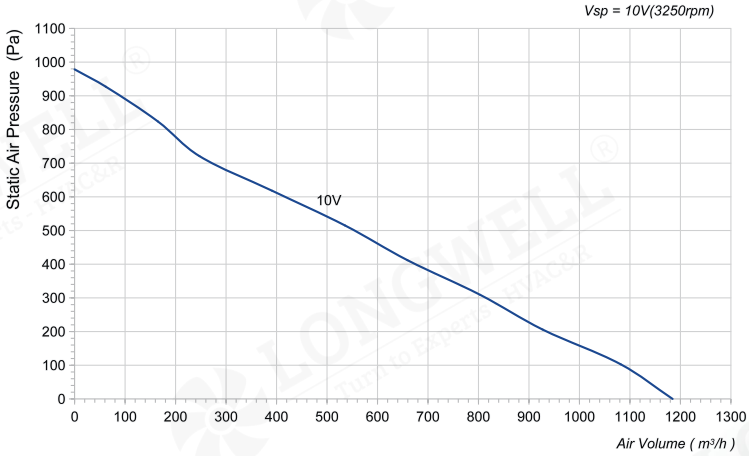



Product Characteristic

- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G220-072NS-08	230	168	1.27	1185	979	3250	70
LWBE3G220-072NU-12	115	168	2.55	1185	979	3250	70

