
LWFE-225 Serise



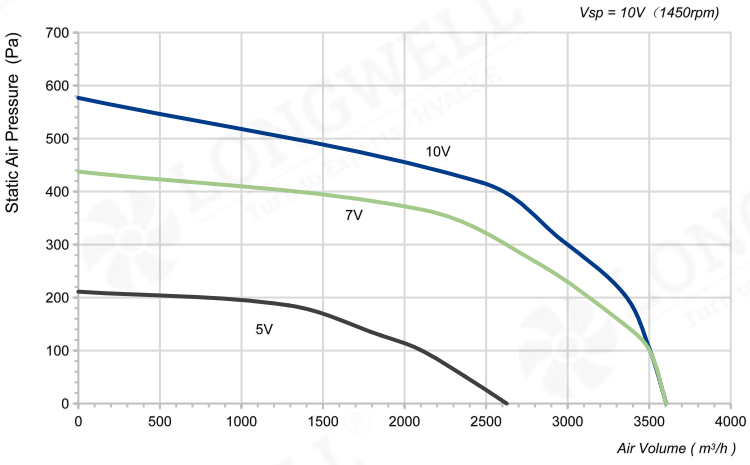


Product Characteristic


- Material : Metal
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G225-138DS-01	380	50/60	1050	1.8	1450	3605	577	78	/

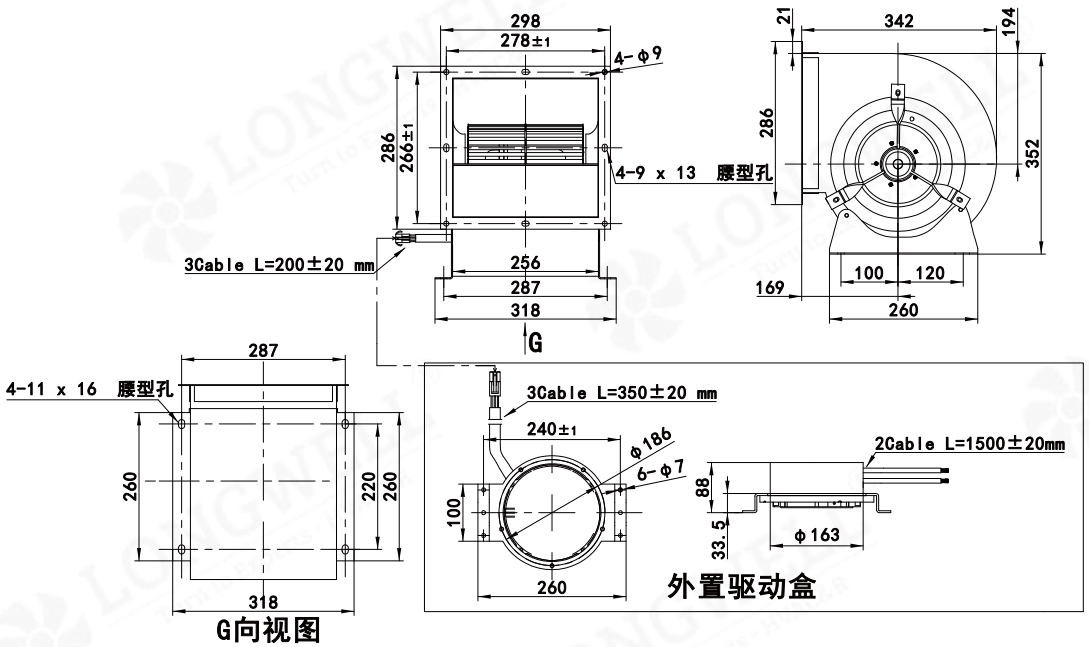

LWFE-225 Serise

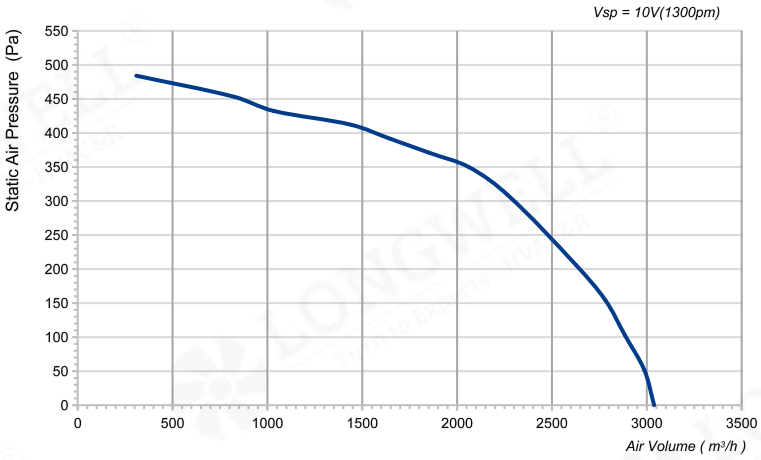




Product Characteristic


- Material : Metal
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃


CE RoHS BSCI ISO EAC UL LVD

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G225-102DS-02	230	50/60	450	1.75	1300	3039	484	68	/

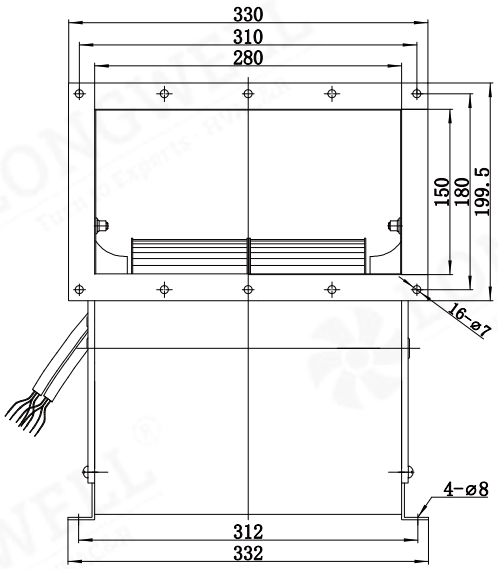

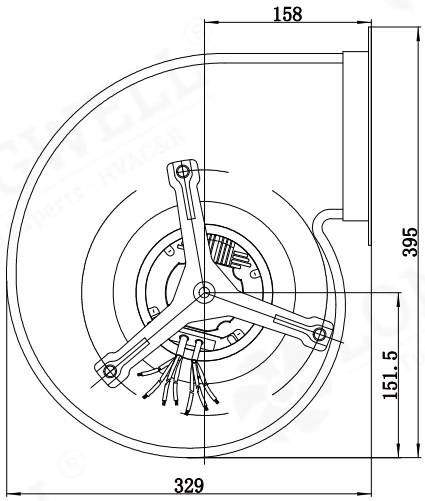

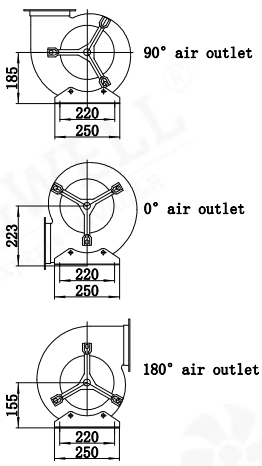

LWFE-225 Serise

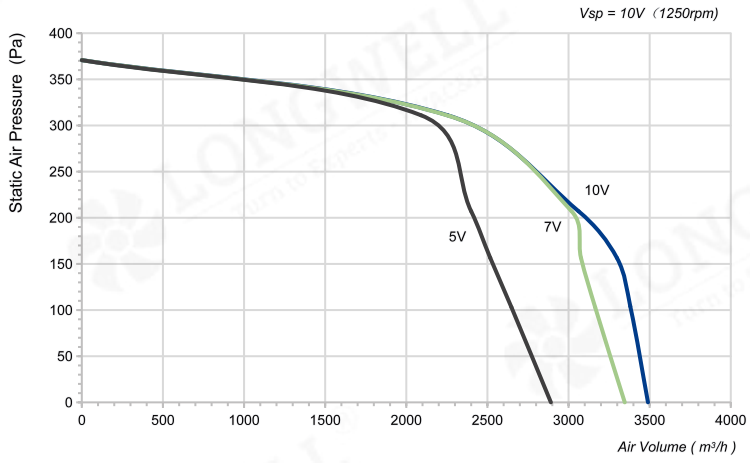



Product Characteristic

- Material : Metal
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: B
- Operation Temperature: -20℃～+60℃

CE RoHS BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G225-138DS-03	230	50/60	750	3.5	1250	3502	371	77	/

