
# LWFE-280 Serise



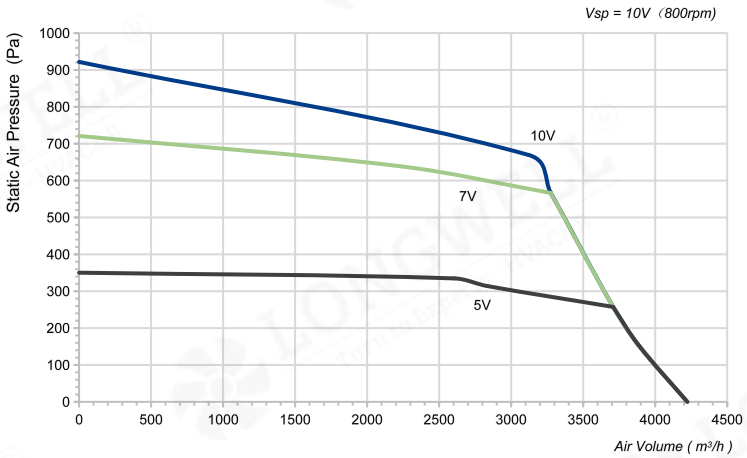



## Product Characteristic

- Material : Metal
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃


CE RoHS BSCI ISO EAC UL LVD

## Technical Specifications

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Current (A) | Speed (RPM) | Air Flow (m³/h) | Air Pressure (Pa) | Noise [dB(A)] | Curve |
|---|---|---|---|---|---|---|---|---|---|
| LWFE3G280-138DS-01 | 380 | 50/60 | 600 | 1.1 | 800 | 4223 | 917 | 72 | / |

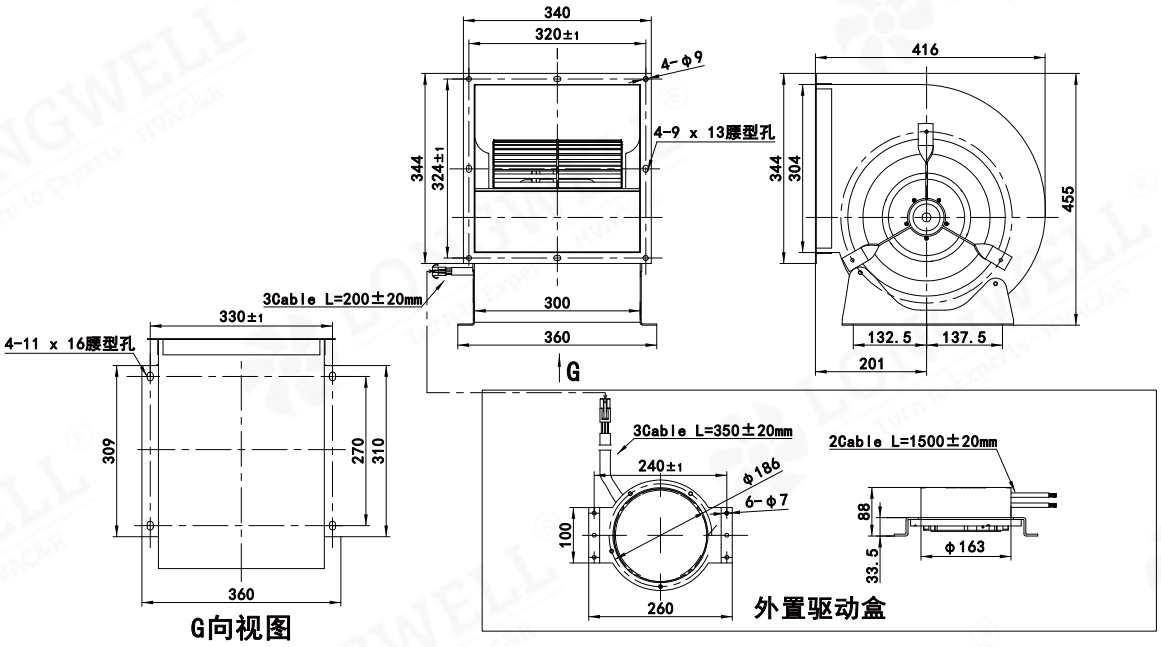

# LWFE-280 Serise

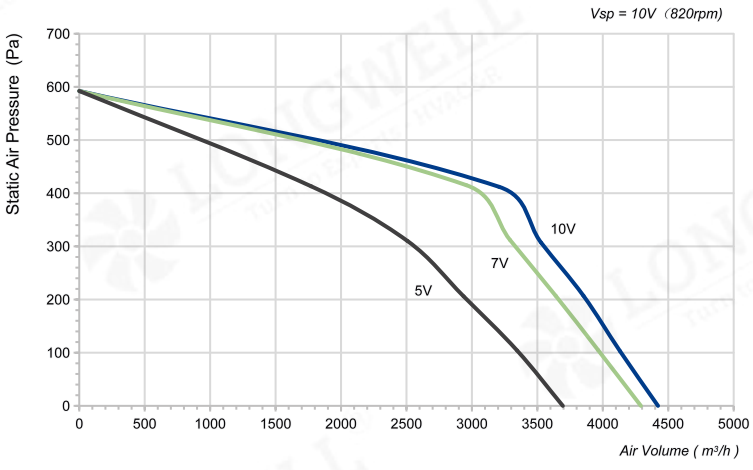




## Product Characteristic

- Material : Metal
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: B
- Operation Temperature: -20℃～+60℃

## Technical Specifications

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Current (A) | Speed (RPM) | Air Flow (m³/h) | Air Pressure (Pa) | Noise [dB(A)] | Curve |
|---|---|---|---|---|---|---|---|---|---|
| LWFE3G280-138DS-02 | 230 | 50/60 | 750 | 3.5 | 820 | 4422 | 592 | 74 | / |

