
LWBE-310 Serise



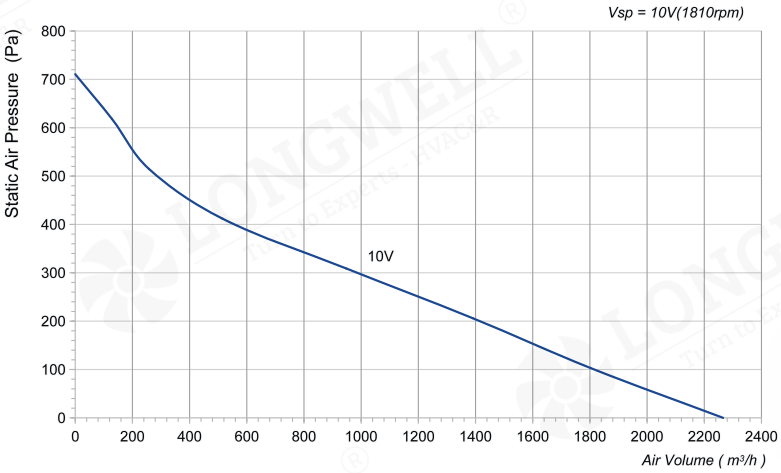



Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-072NS-07	230	175	1.25	2266	700	1810	66
LWBE3G310-072NU-27	115	175	2.5	2266	700	1810	66

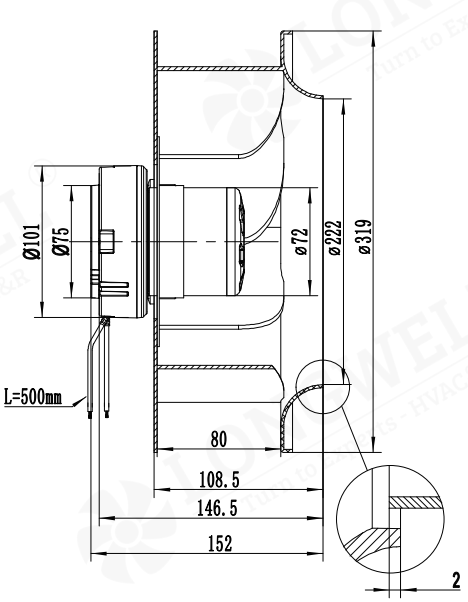

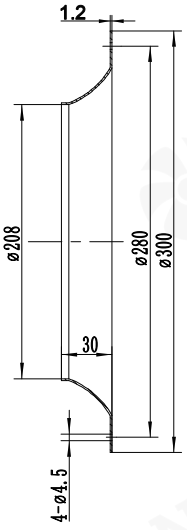

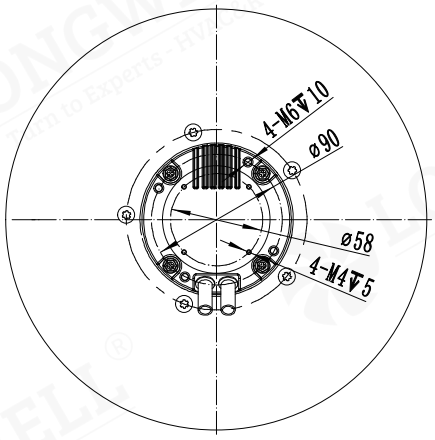

LWBE-310 Serise

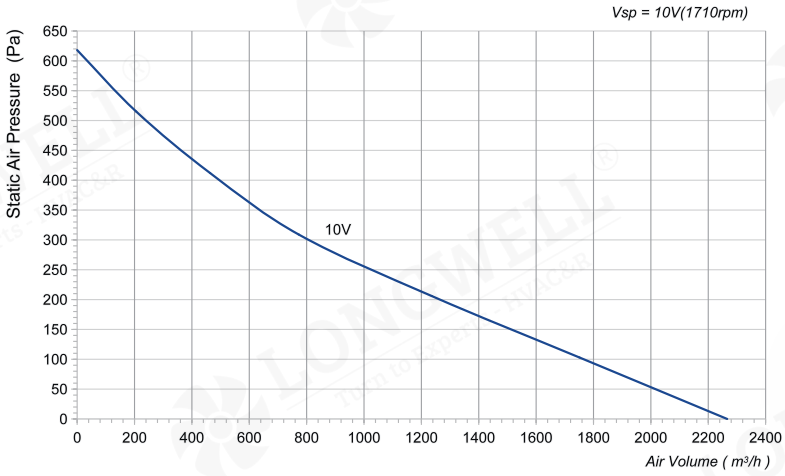




Product Characteristic


Impeller Material:	Aluminum Alloy	Supply Voltage:	230V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP55	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-072NS-21	230	175	1.25	2266	618	1710	72

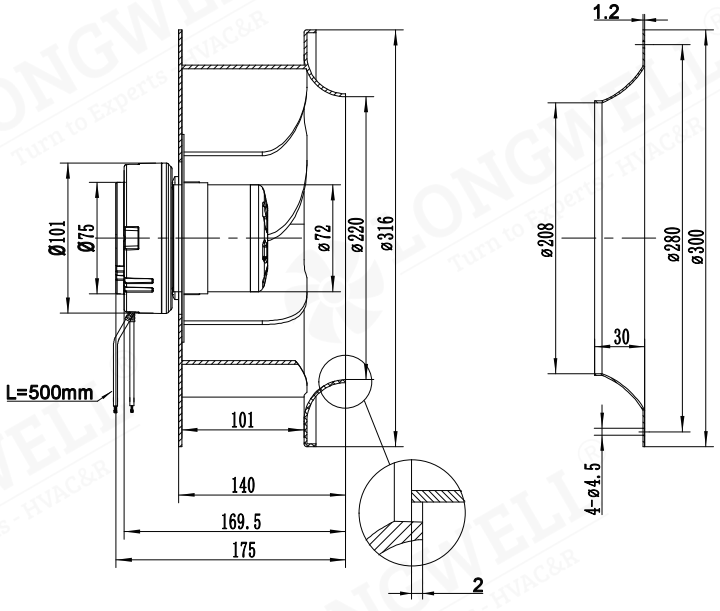

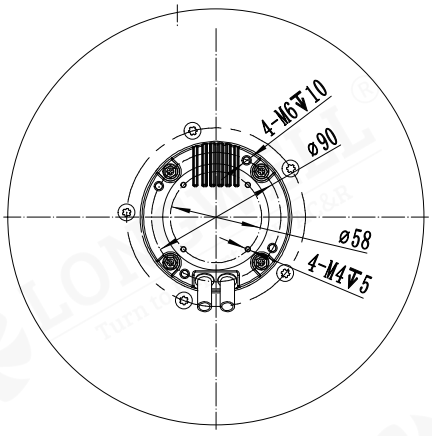

LWBE-310 Serise

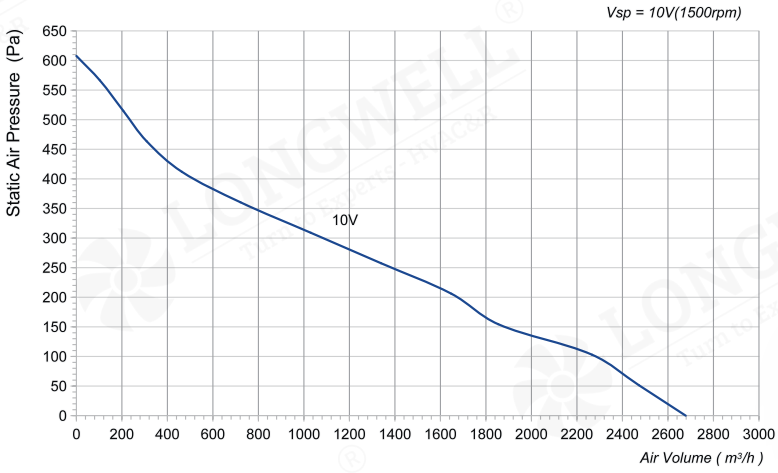




Product Characteristic

• Impeller Material:	Aluminum Alloy	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP55	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM


• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092NS-22	230	175	1.3	2678	608	1500	63
LWBE3G310-092NU-28	115	175	2.6	2678	608	1500	63

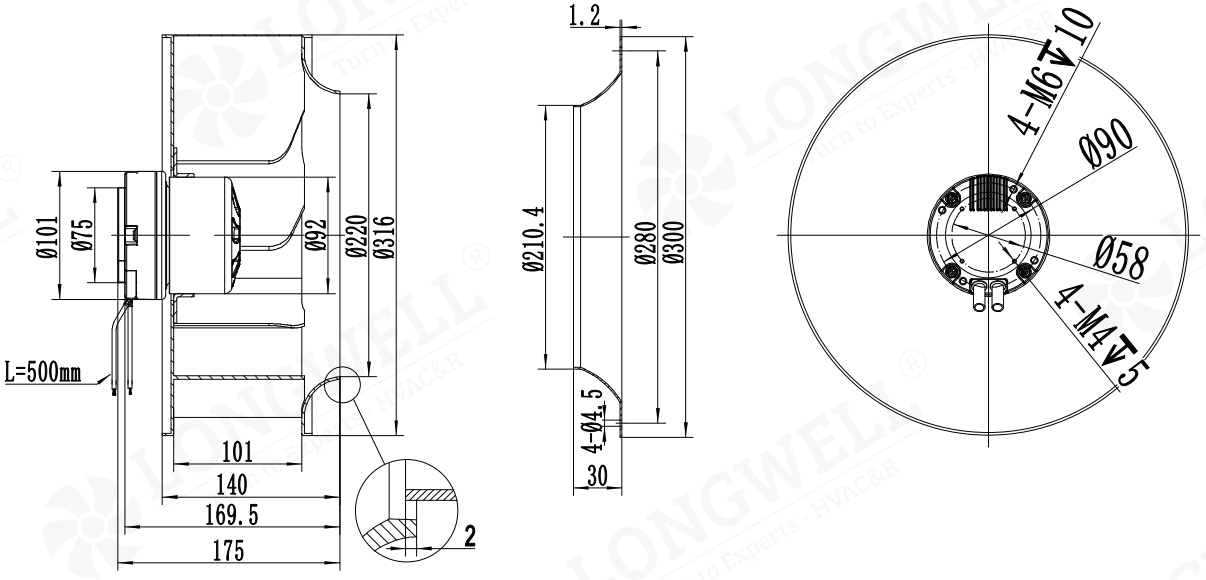

LWBE-310 Serise

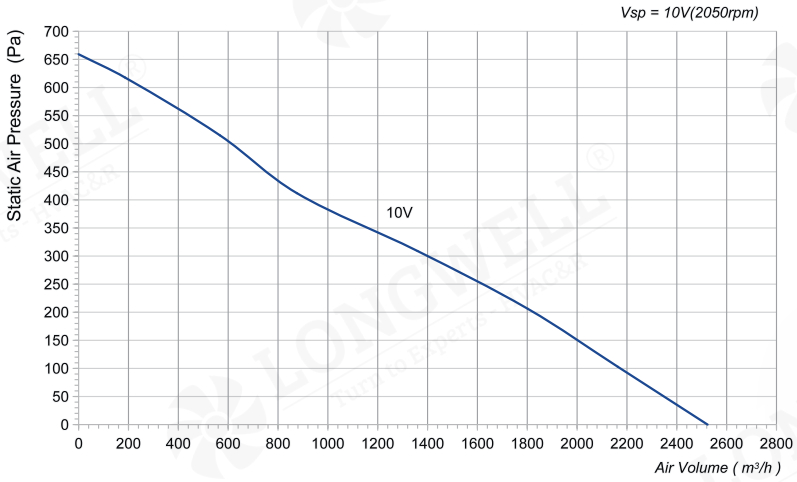





Product Characteristic

- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092NS-23	230	220	1.55	2524	670	2050	66
LWBE3G310-092NU-29	115	220	3.1	2524	670	2050	66

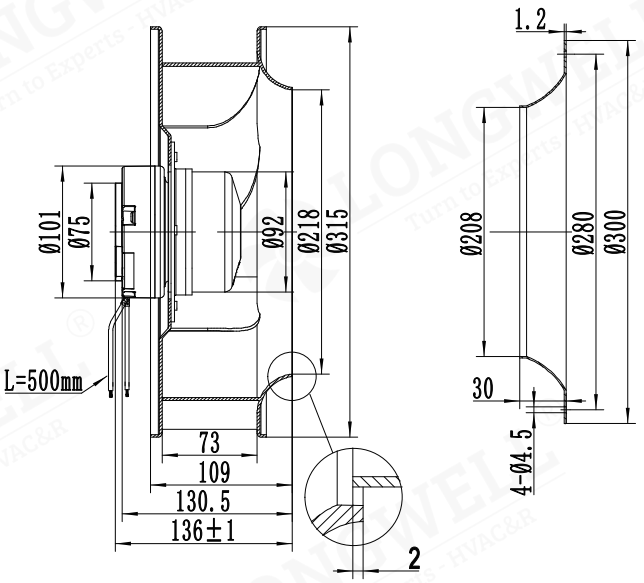

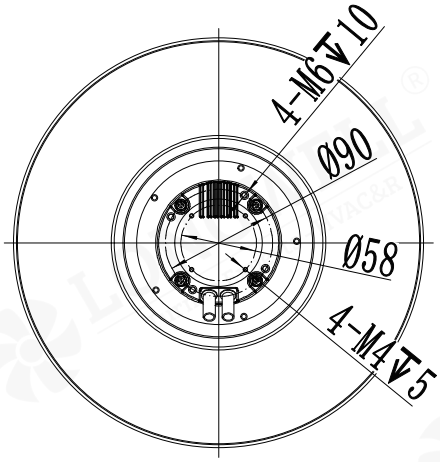

LWBE-310 Serise

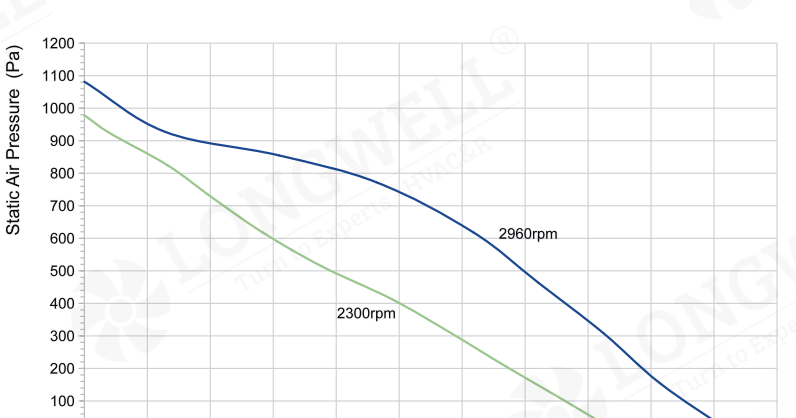




Product Characteristic

Impeller Material:	Aluminum Alloy	Supply Voltage:	230V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP55	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM


- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102NS-09	230	700	3.1	4120	1082	2960	85
LWBE3G310-102NU-30	115	400	3.6	3399	979	2300	70

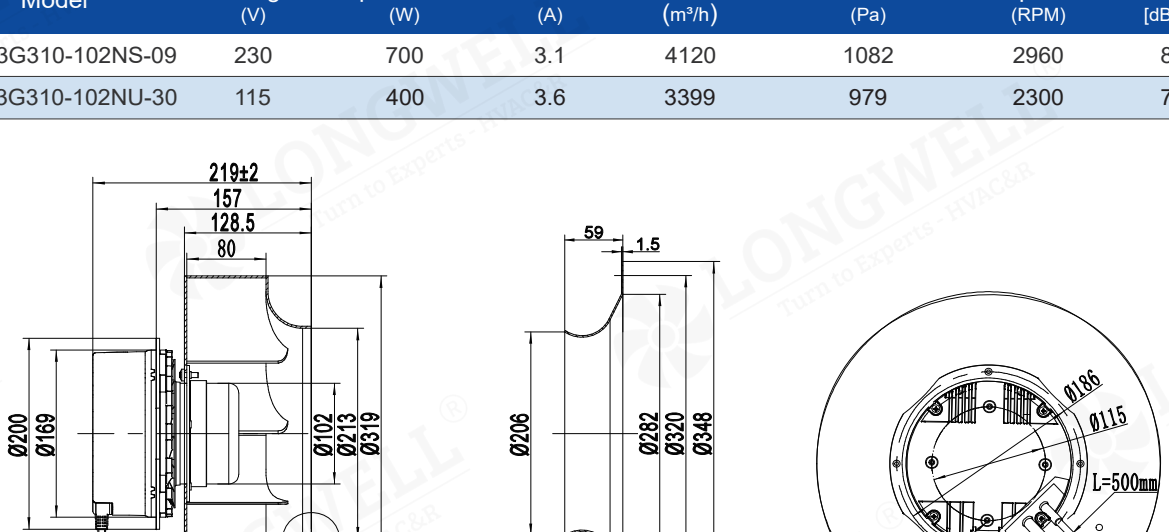

LWBE-310 Serise

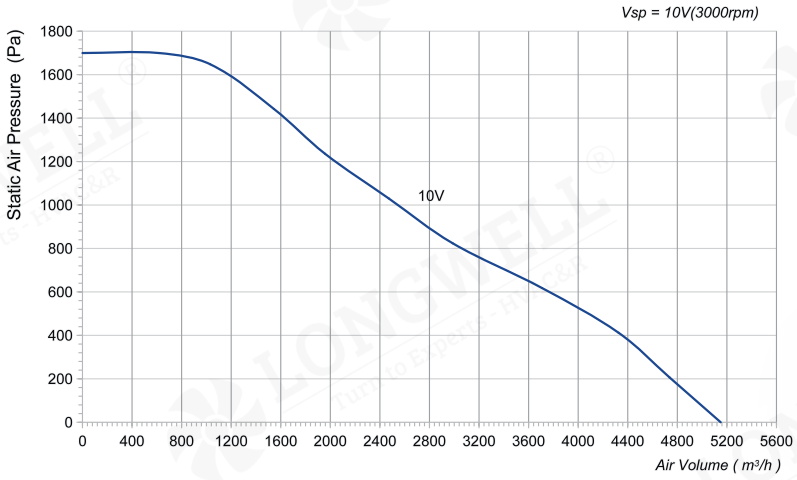



Product Characteristic

Impeller Material:	Aluminum Alloy	Supply Voltage:	400V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP55	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102NT-24	400	1100	1.2	5150	1730	3000	85

