
LWBE-450 Serise



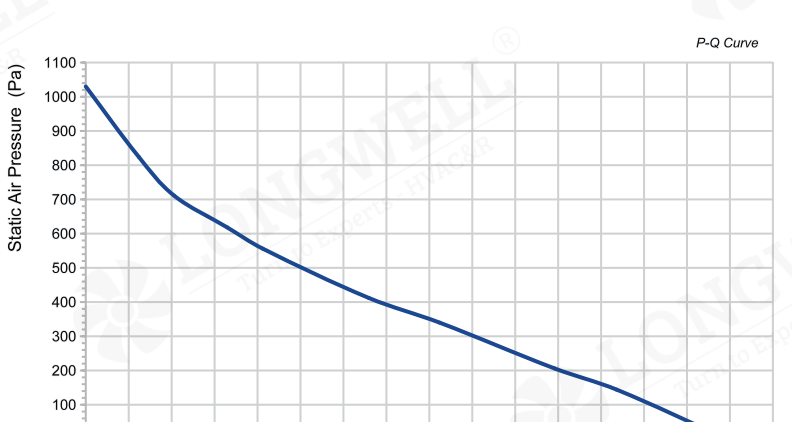



Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-102NS-19	230	700	3.1	7468	1030	1450	70

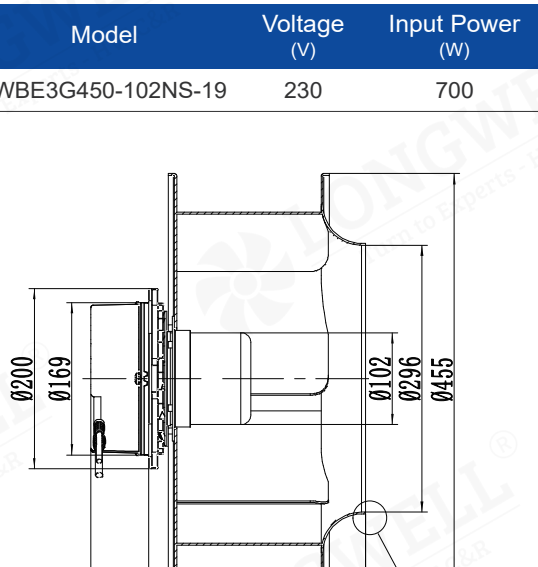


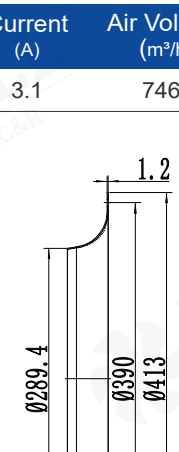

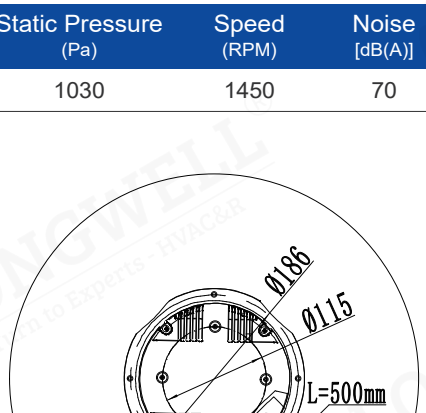

LONGWELL®
Turn to Experts - HVAC&R

LWBE-450 Serise

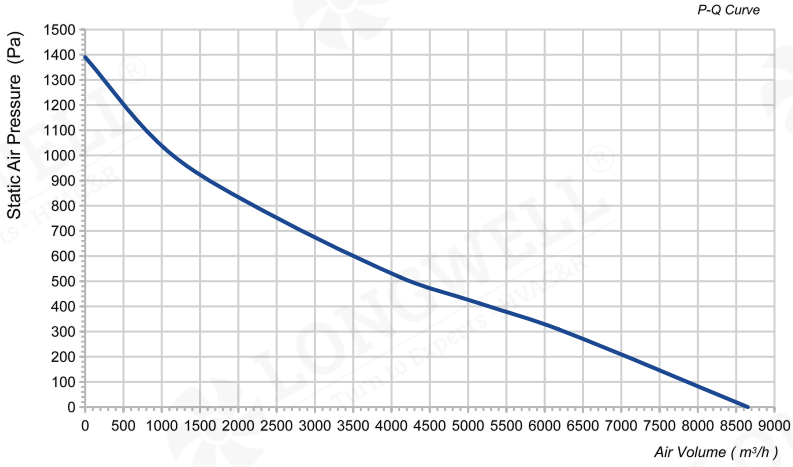



Product Characteristic

- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

CE RoHS compliant ETL Intertek BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-102NT-20	380	1100	1.8	8652	1391	1500	85

