
LWAE-710 Serise



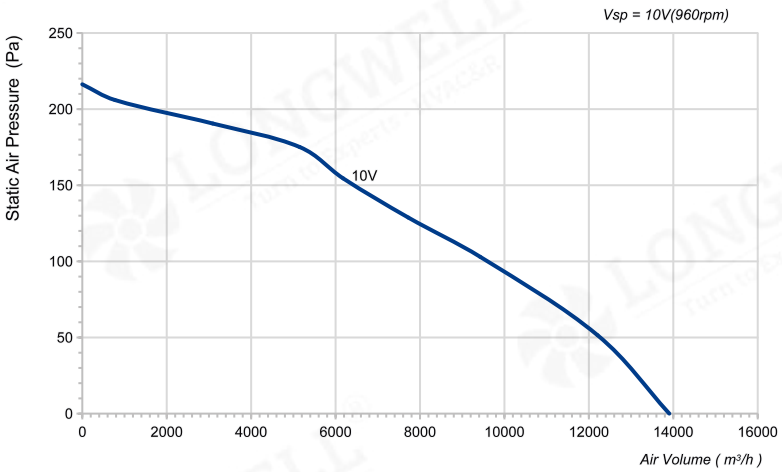


Product Characteristic


- Material : Aluminium alloy
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G710TS-5MKW-01	230	50/60	3.5	520	960	13905	75

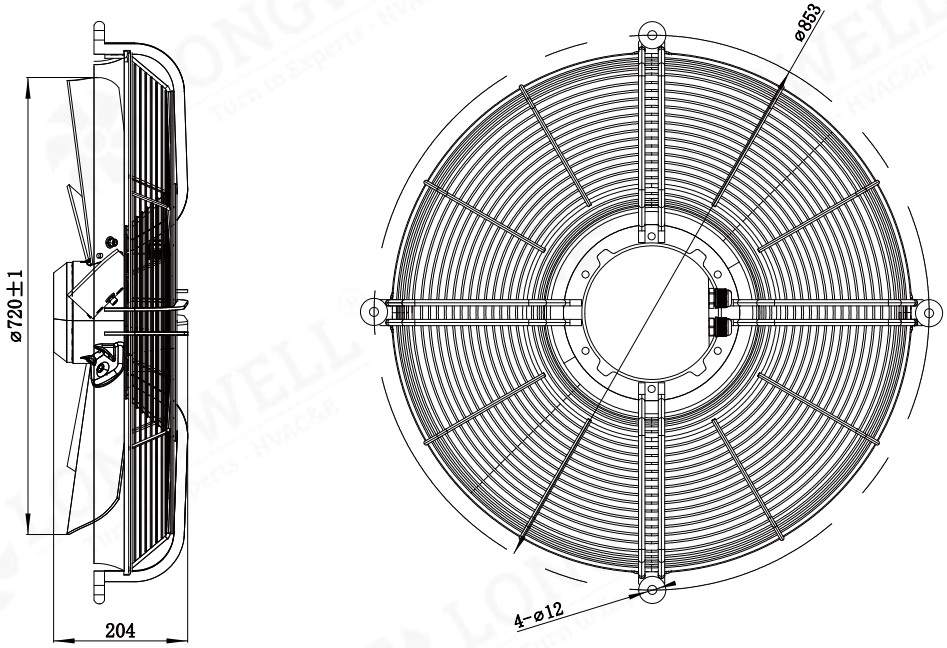

LWAE-710 Serise

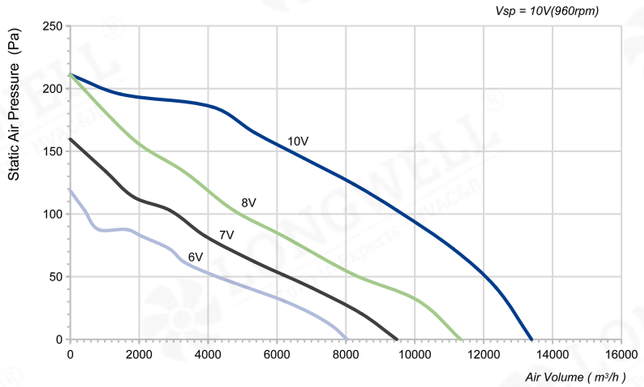




Product Characteristic


- Material : Aluminium alloy
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G710TS-5MKW-02	3-380	50/60	1.3	650	960	13390	75

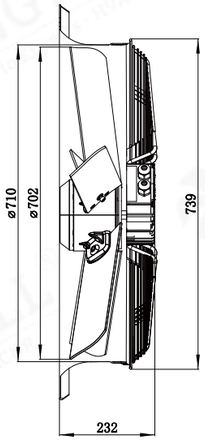

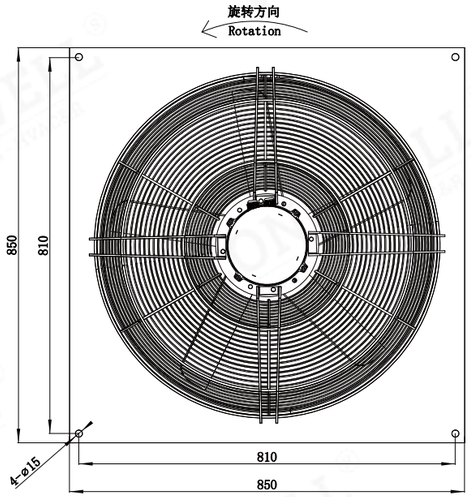

LWAE-710 Serise

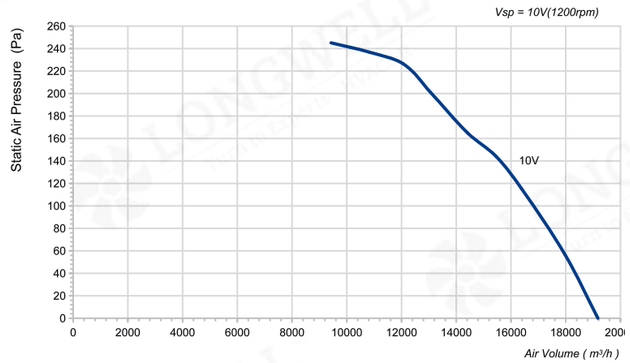



Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM/RS485
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G710TS-5PKW-03	400	50/60	1.97	1146	1200	19177	81

