Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-225 Serise




Product Characteristic


- Impeller Material: Plastic PA66
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-072PS-11	230	80	0.6	1112	433	2500	69

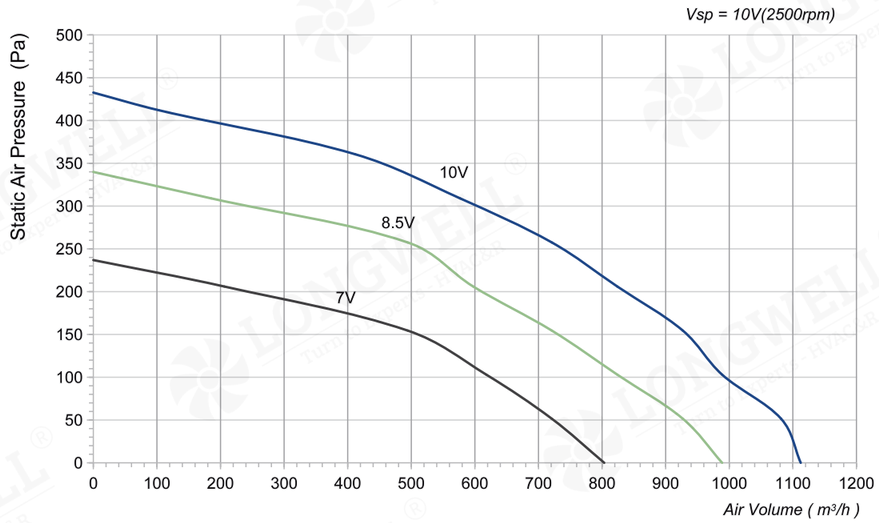

LWBE3G225-072NS-10 (without bracket)

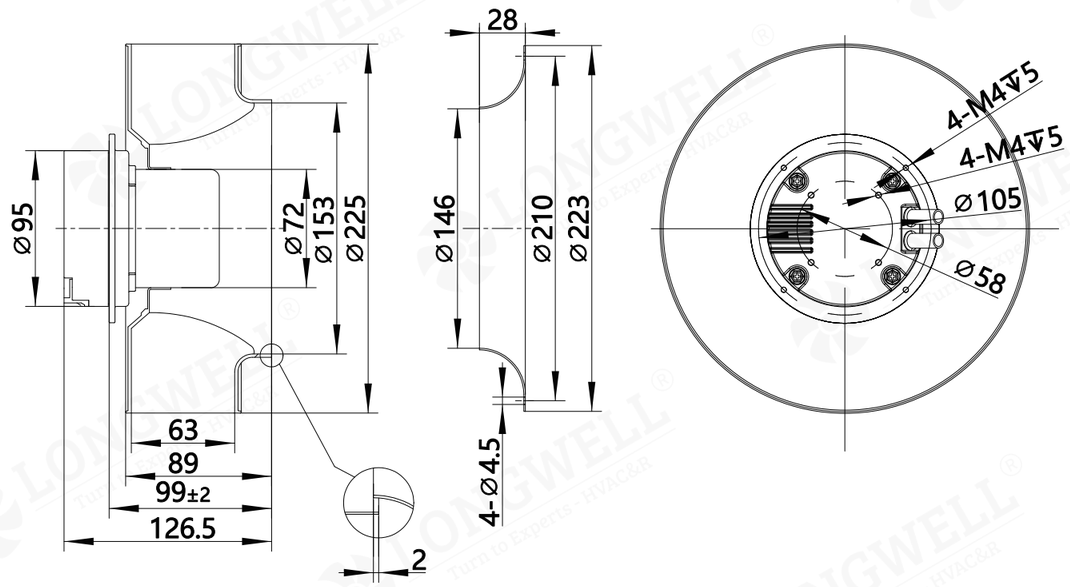

LWBE3G225-072PS-11 (with bracket)

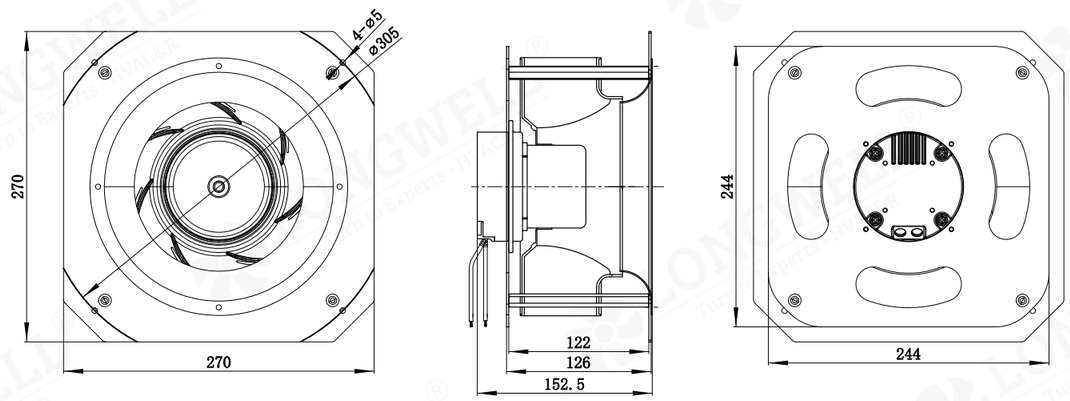

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-225 Serise




Product Characteristic


- Impeller Material: Plastic PA66
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-092PS-12	230	170	1.4	1528	683	3060	71.1

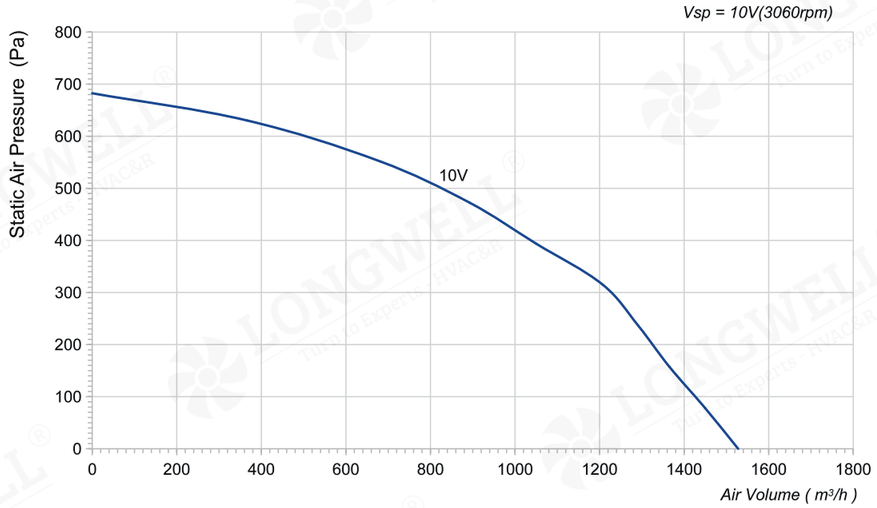


LWBE3G225-092NS-11 (without bracket)

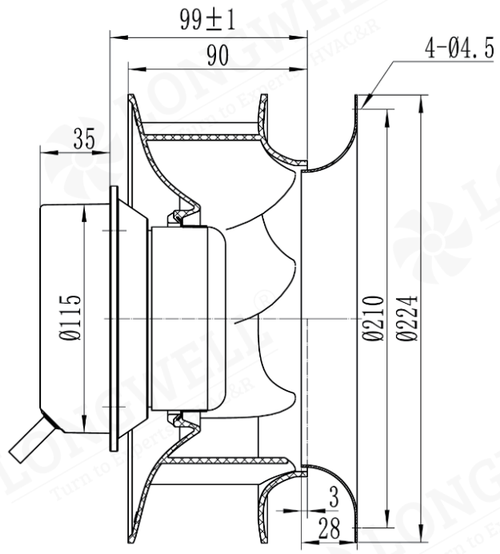

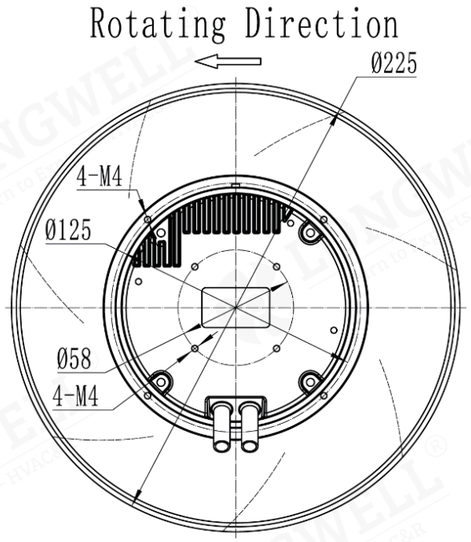

LWBE3G225-092PS-12 (with bracket)

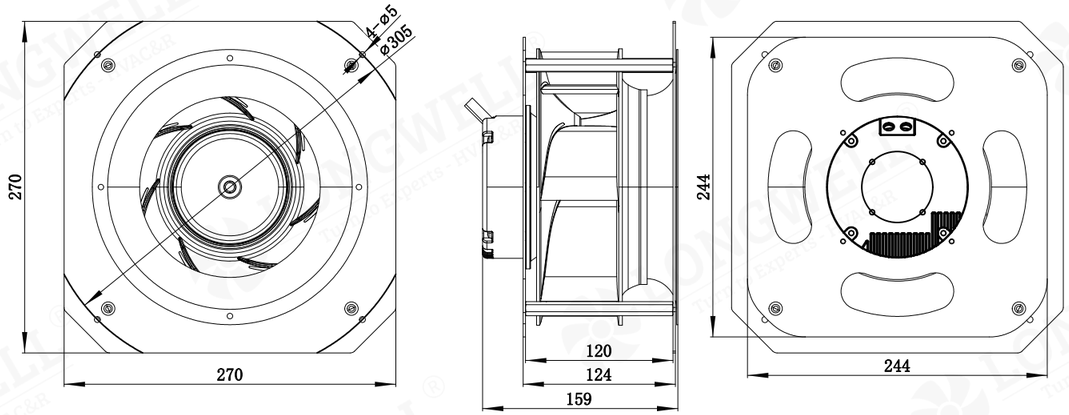

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-225 Serise




Product Characteristic


- Impeller Material: Plastic PA66
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-092PS-13	230	160	1.1	1545	731	3000	71

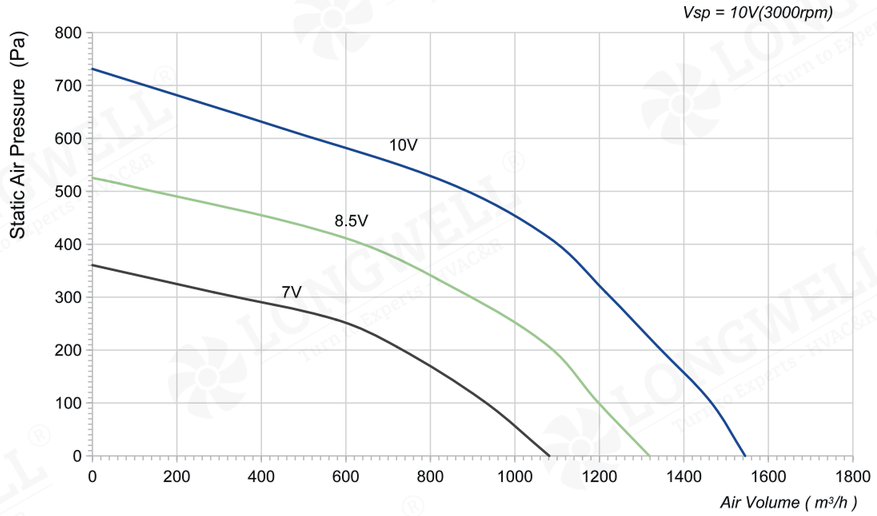

LWBE3G225-092NS-12 (without bracket)

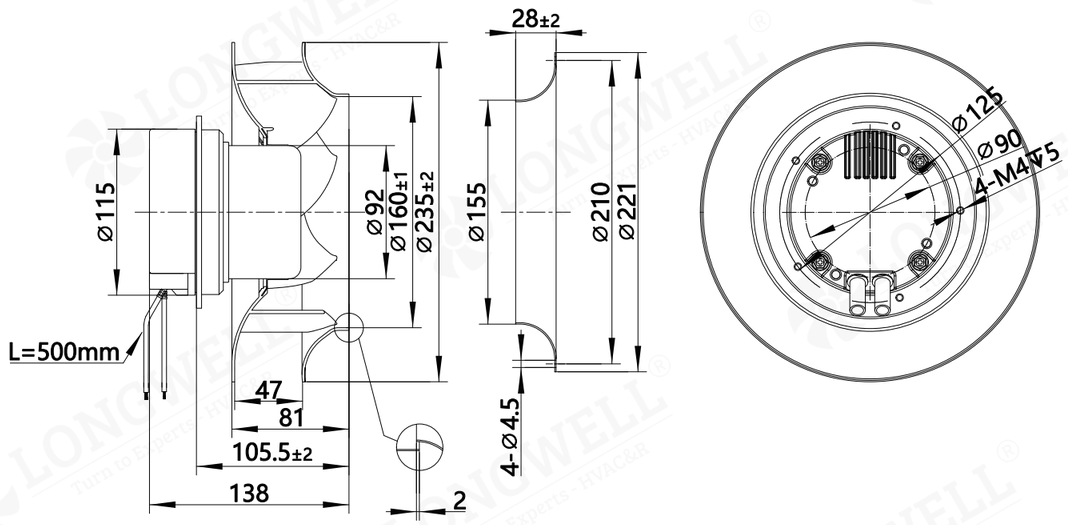

LWBE3G225-092PS-13 (with bracket)

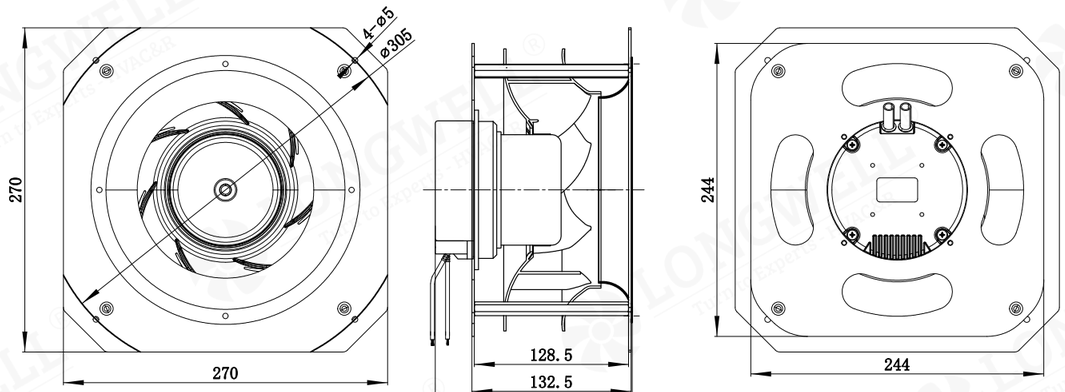

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-225 Serise




Product Characteristic


- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-092PS-07	230	315	1.87	1630	839	3500	71

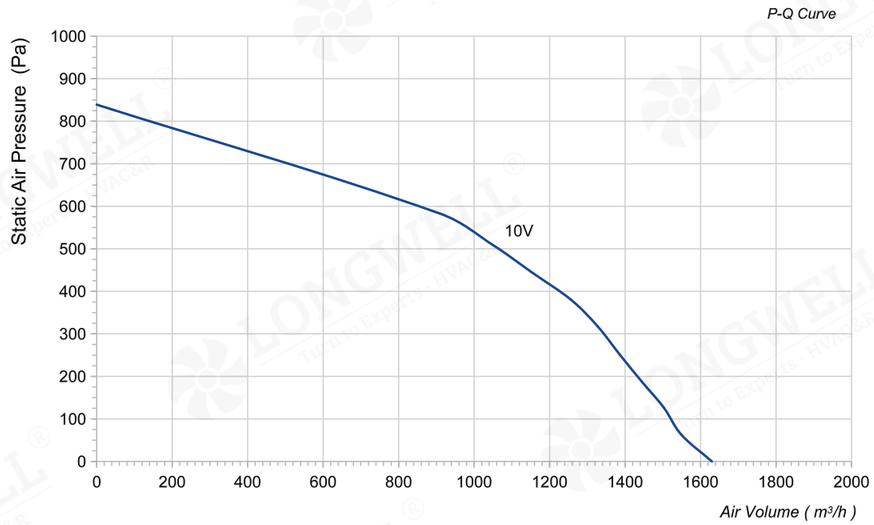

LWBE3G225-092NS-13 (without bracket)

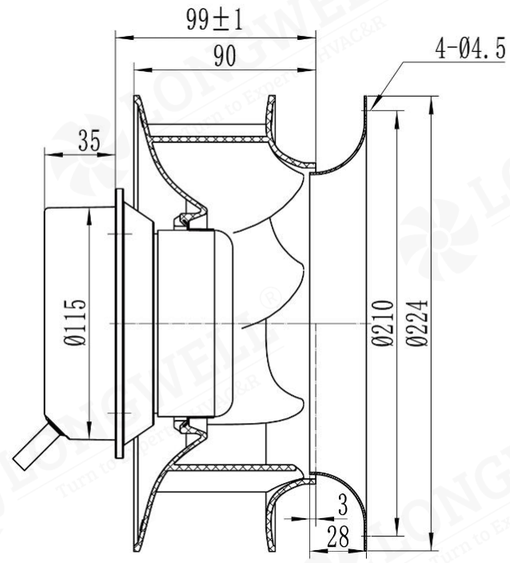

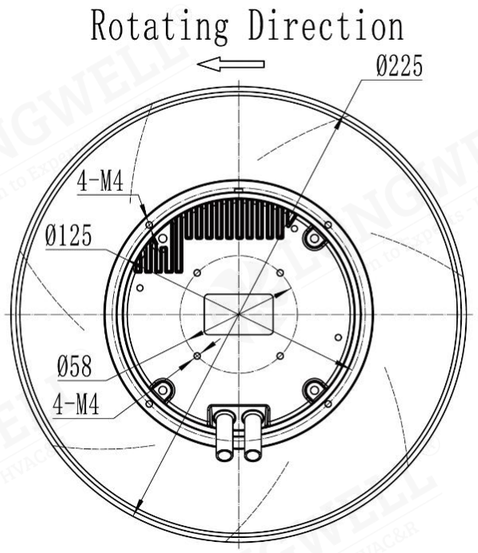

LWBE3G225-092PS-07 (with bracket)

